


Installation Guide

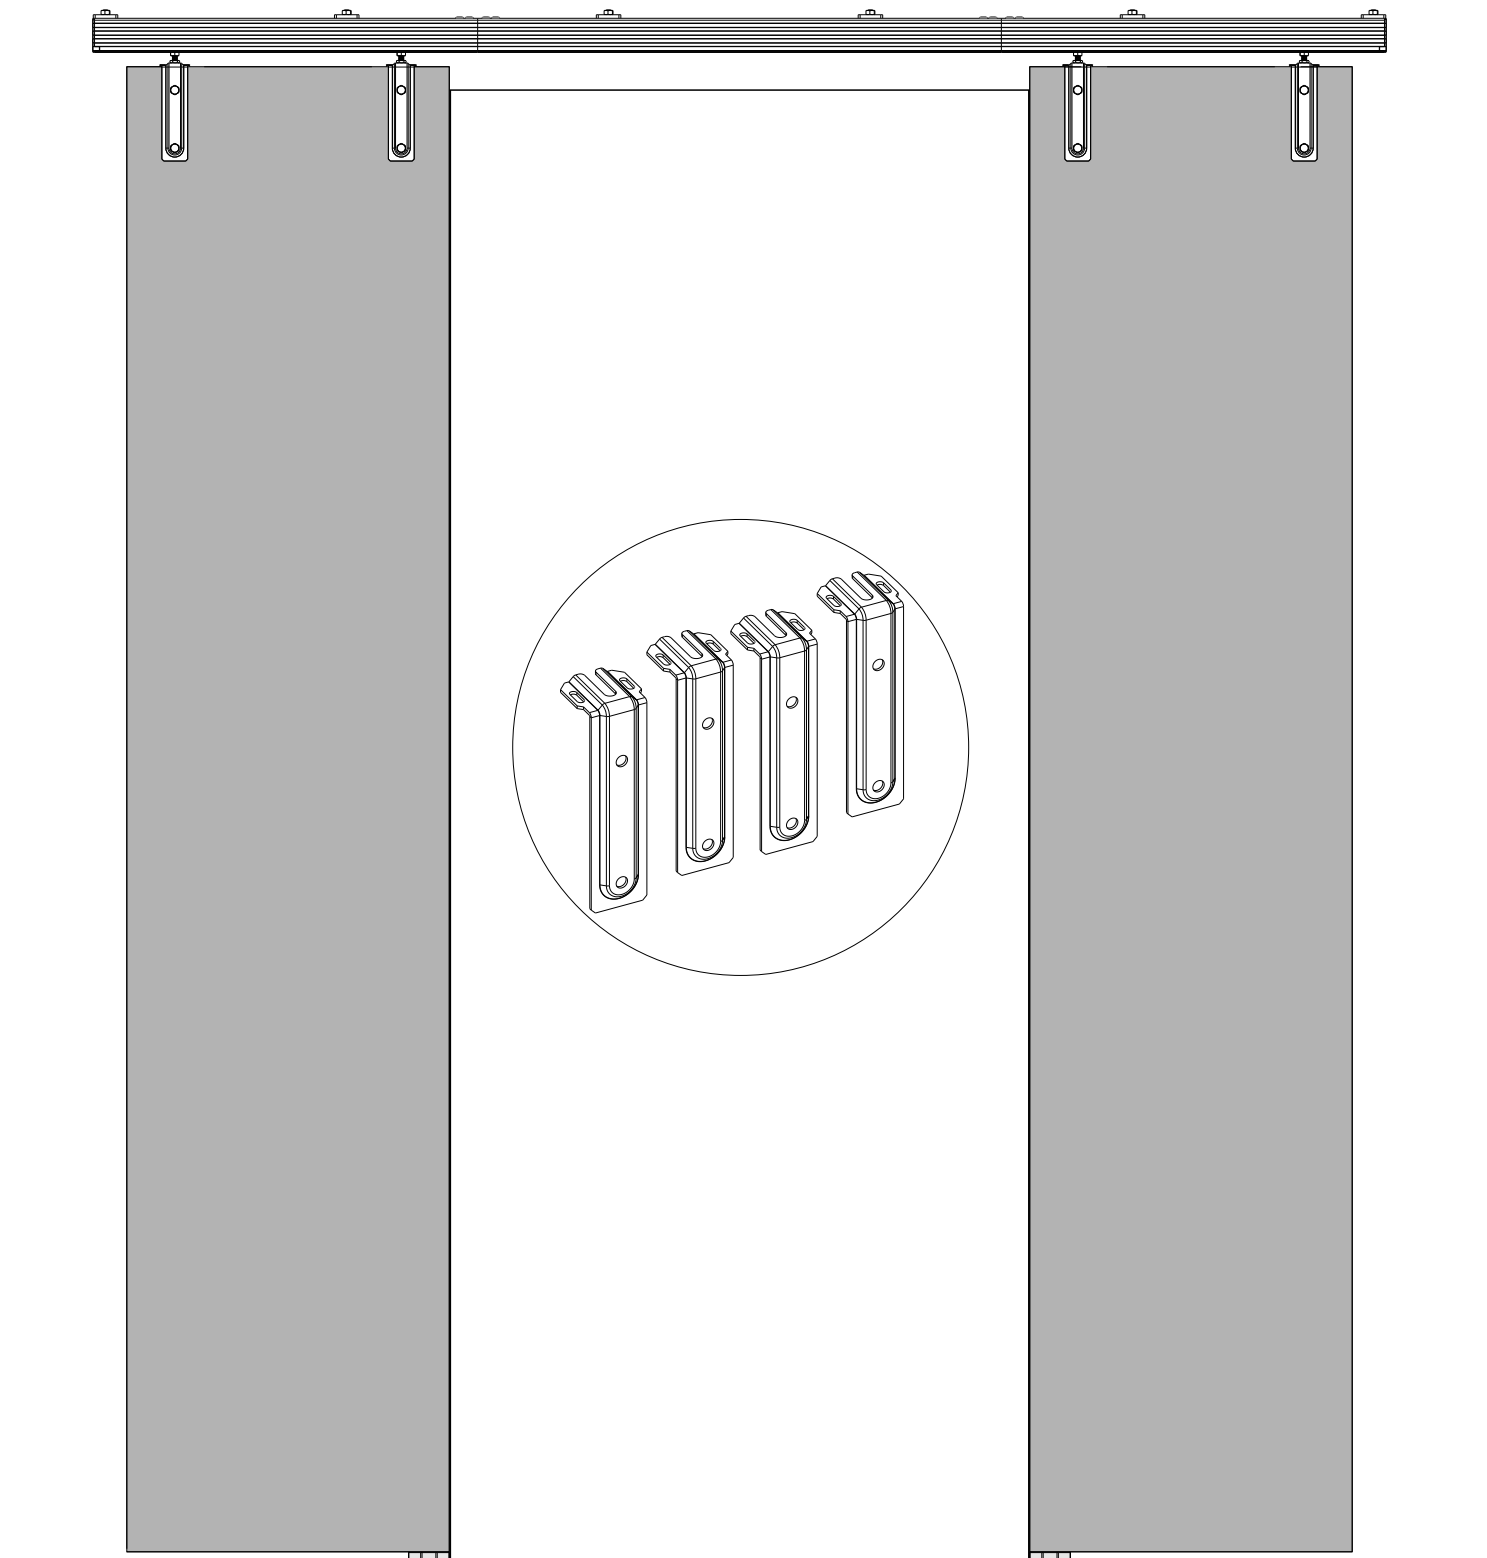

EC

REP

Company: E-CrossStu GmbH
Address: Mainzer Landstr.69, 60329 Frankfurt am Main
Mail: E-CrossStu@web.de

UK

REP

Company: YH Consulting Limited
Address: C/O YH Consulting Limited Office 147, Centurion House,
London Road, Staines-upon-Thames, Surrey, TW18 4AX
Mail: H2YHUK@gmail.com



P00DZB
(6FT~9FT)

WARNING and CAUTION !!!

EN English

Please follow all safety operating procedures during installation. Pay attention to keep this product away from children.

DE Deutsch

Bitte beachten Sie während der Installation alle Sicherheitsvorschriften. Achten Sie darauf, dieses Produkt von Kindern fernzuhalten.

FR Français

Pendant l'installation, suivez toutes les procédures d'exploitation de sécurité. Prenez soin de garder ce produit loin des enfants.

IT Italiano

Si prega di seguire tutte le procedure operative di sicurezza durante l'installazione. Prestare attenzione a tenere questo prodotto lontano dai bambini.

ES Español

Durante la instalación, siga todos los procedimientos de operación de Seguridad. Preste atención a mantener este producto alejado de los niños.

NL Nederlands

Volg alle veiligheidsprocedures tijdens de installatie. Let op om dit product uit de buurt van kinderen te houden.

PL Polski

Podczas instalacji należy przestrzegać wszystkich procedur bezpieczeństwa. Zwróć uwagę, aby trzymać ten produkt z dala od dzieci.

CZ Čeština

Během instalace dodržujte všechny bezpečnostní provozní postupy. Věnujte pozornost tomu, aby tento výrobek udržel dál od dětí.

SE Svenska

Följ alla säkerhetsrutiner under installationen. Var uppmärksam på att hålla denna produkt borta från barn.









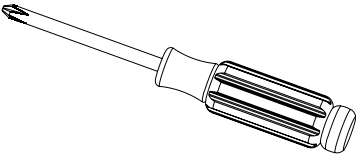

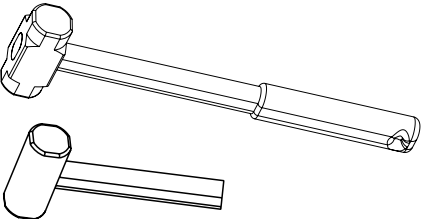

TR Türkçe

Lütfen kurulu sırasında tüm güvenlik işleme prosedürlerini takip edin. Bu ürünü çocuklardan uzak tutmak için dikkat et.

Please Read Carefully

 <p>Read all instructions carefully</p>	 <p>Protect your eyes by wearing safety goggles</p>	 <p>Keep the installation area free of clutter</p>	 <p>We recommend two people for certain parts of the installation</p>	 <p>Follow each step completely before starting the next step</p>
--	---	--	--	---


Tools Needed(Prepared by Yourself)

<p>levelling instrument</p> 	<p>Stud Finder</p> 	<p>Tape measure</p> 
<p>Speed Square</p> 	<p>Marking tools</p> 	<p>Deep Socket Wrench</p> 
<p>Drill bits</p> 	<p>Electric drill</p> 	<p>Phillips screwdriver</p> 
<p>Combination Wrench</p>  <p>Two #13 wrenches.</p>	<p>Hammer</p>  <p>Rubber Hammer</p>	<p>Please have all of the above tools available before installation so that installation will be easier.</p> 

IMPORTANT!


Check whether all the parts are complete after receiving the goods, if there are missing or damaged, please do not return the goods, contact your customer service, we will provide you with free replacement.

Packaging List (Easier installation by part number marking)

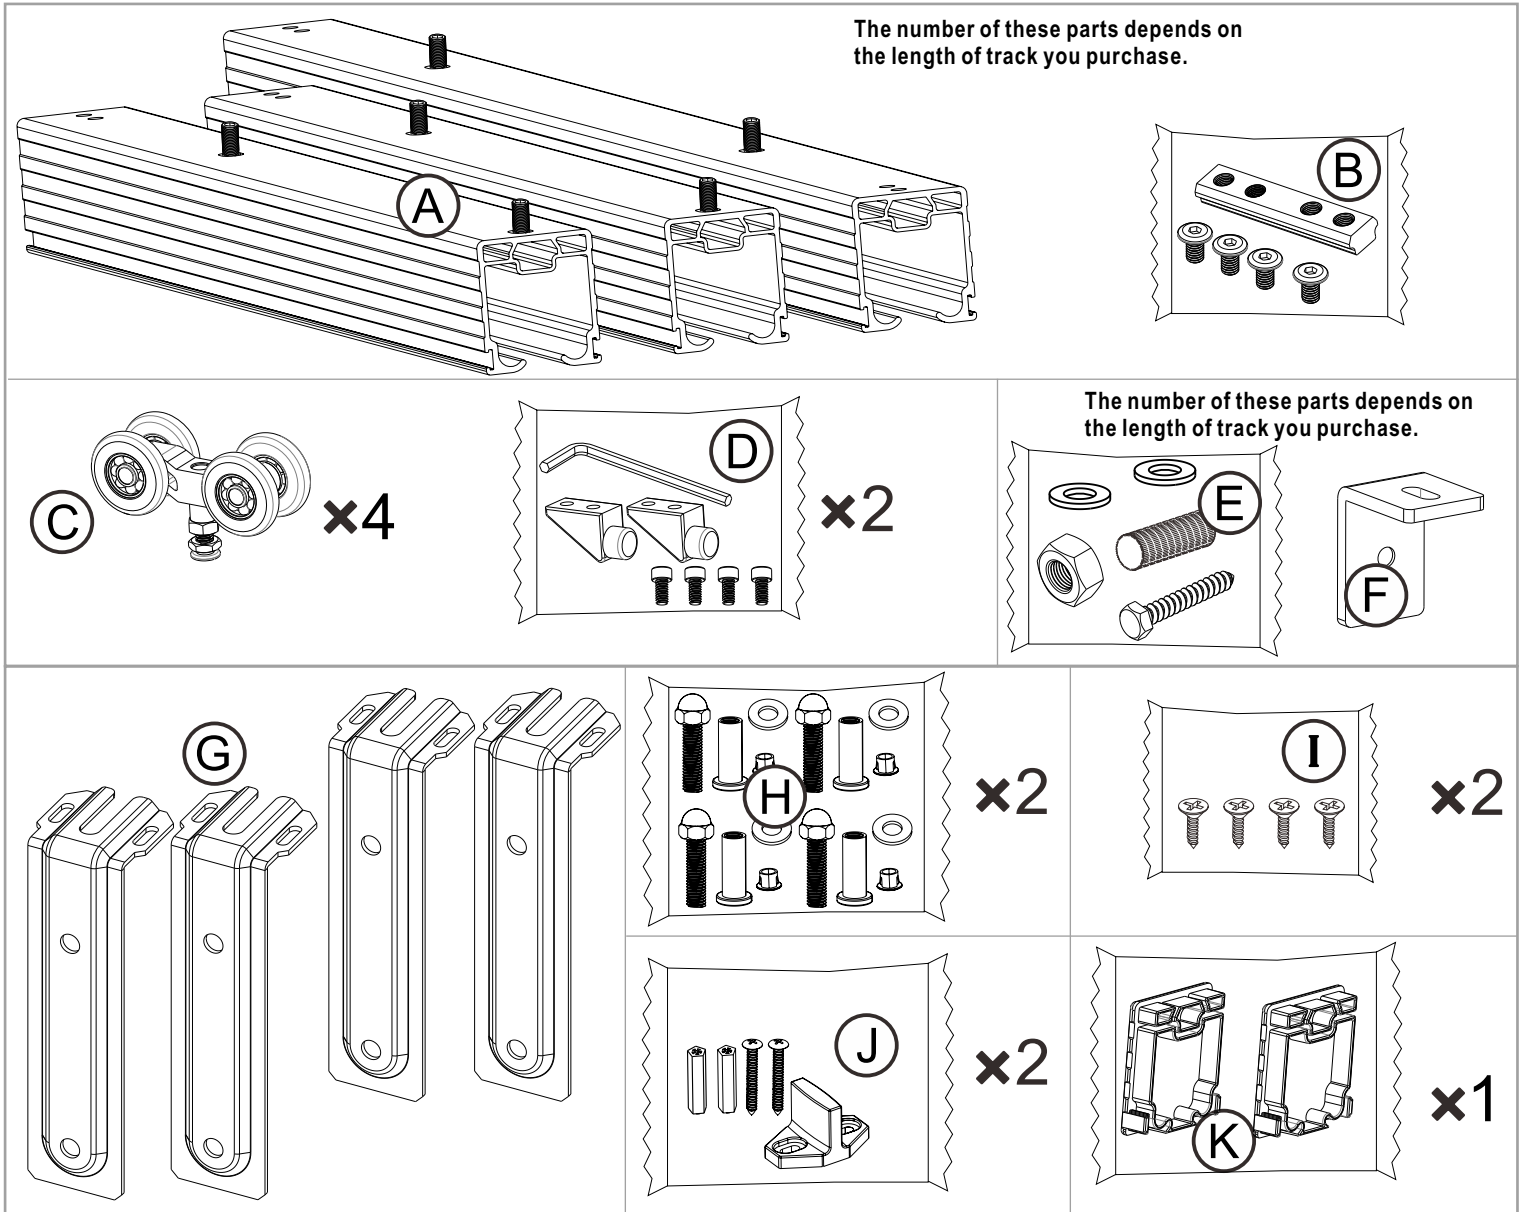

Check the length and drilling distance of the purchased track

There is an error of about
3mm($\frac{1}{8}$ " in size)

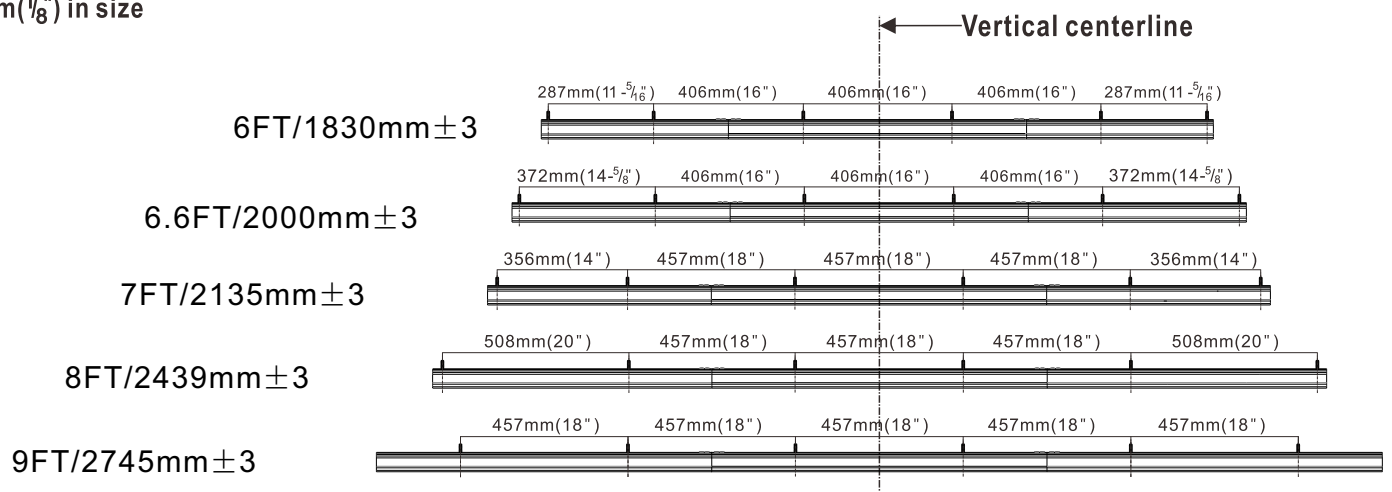

Tips: Required Dimensions

Track Fits Max. Door Opening

The minimum distance from the top of door opening to the ceiling is 120mm (4-³/₄")

Opening Max.

floor

Track lengths and applicable door opening widths

Track length	Max opening width
6FT\1830mm	32inch\813mm
6.6FT\2000mm	35inch\890mm
7FT\2135mm	38inch\965mm
8FT\2439mm	44inch\1120mm
9FT\2745mm	50inch\1270mm

There is an error of about 3mm(¹/₈") in size

Track Fits Door Panel Size

Opening width+ 80mm~100mm (3~4")

¹/₂ total width

floor

Door Panel Total Width:
Door Opening Width +80-100mm(3-4").

Door Panel Height:
Door Opening Height +25-50mm(1-2").

Door Panel Thickness:25–48mm(1~1- ⁷/₈").

Door Panel Weight :Max150kg (330lbs)

Track Installation Position

Half length of the track

Half length of the track

Center of track

Half of door opening width

Half of door opening width

Vertical centerline

10mm (³/₈") clearance between bottom door and floor

Bottom of floor to center of track= Door panel height+65mm(2-⁹/₁₆")

floor

Center of track position:
Door panel height+65mm(2-⁹/₁₆")

Vertical of track position:
Half of door opening width and Half length of the track

Before You Begin

Warning: Do not install the track directly on drywall or other walls which don't have enough weight capacity. If necessary, we recommend using a solid wood Header Board.

⚠ Ensure That Your Wall Has Sufficient Load-bearing.

Brick Walls : Solid Brick Wall	Hollow Brick Wall	Cement wall/ Concrete Wall	Wooden Frame Wall	Gypsum board wall (If the interior of the wall is made of wood load-bearing structure) needs to be installed with "Header board", and then continue to install this track.	Gypsum board wall (If the interior of the wall is made of steel or iron) cannot be installed with this track.

1 Check Your Wall

Check your shed roof construction before installing. Different constructions require different tools


Wood frame walls and gypsum board wall require the following tools :

(drilling steps on page7-9)

Tools

Stud Finder 	levelling instrument 	Speed Square 	Tape measure 	Marking tools 	Electric drill Drill bits 3mm (1/8") 	Deep Socket Wrench
-----------------	--------------------------	------------------	------------------	-------------------	--	------------------------

Parts

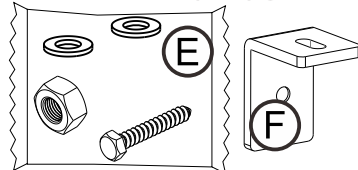


Solid Brick Wall\Hollow Brick Wall\Concrete wall and cement wall require the following tools:

(drilling steps on pages10-11)

Tools

Tape measure 	levelling instrument 	Speed Square 	Marking tools 	Electric drill Drill bits 3mm (1/8") 15mm (1/2") 	Deep Socket Wrench
------------------	--------------------------	------------------	-------------------	---	------------------------


Parts

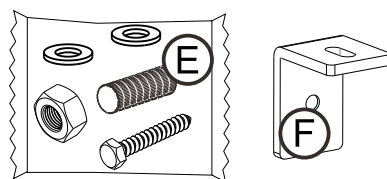

2 Check for level floor and center of track level

IMPORTANT!


- ★ To ensure that the door opens and closes properly, use a level to check the floor and center of track are level before installing and measuring.
- ★ Tracks that are not level can cause sliding doors to jam, or door panels to slide sideways

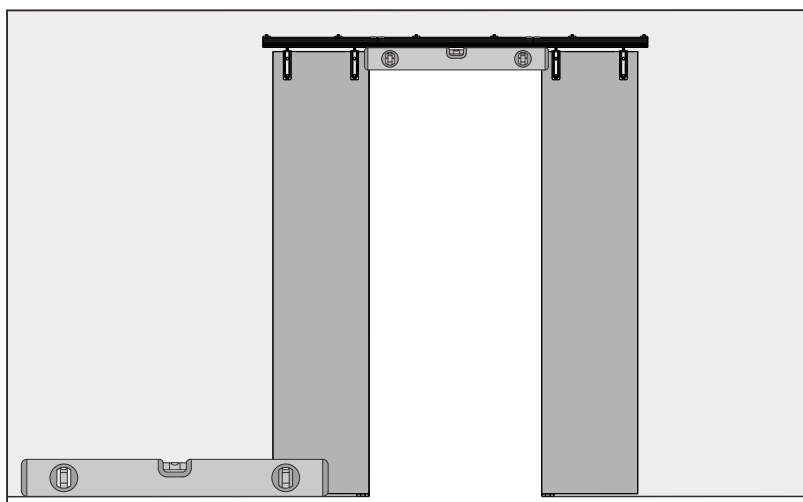


Step1 Tracks Connection

① Arrange tracks by serial number


⚠ Wrong track orientation will not align the splice

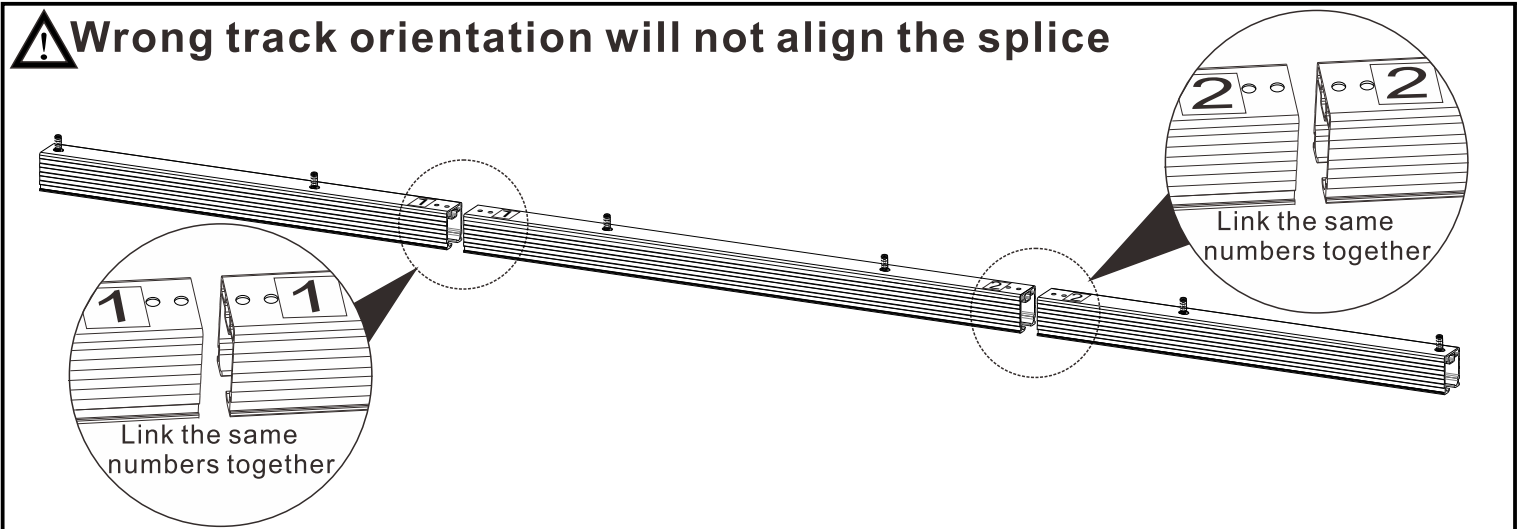


② Connecting Segment Tracks

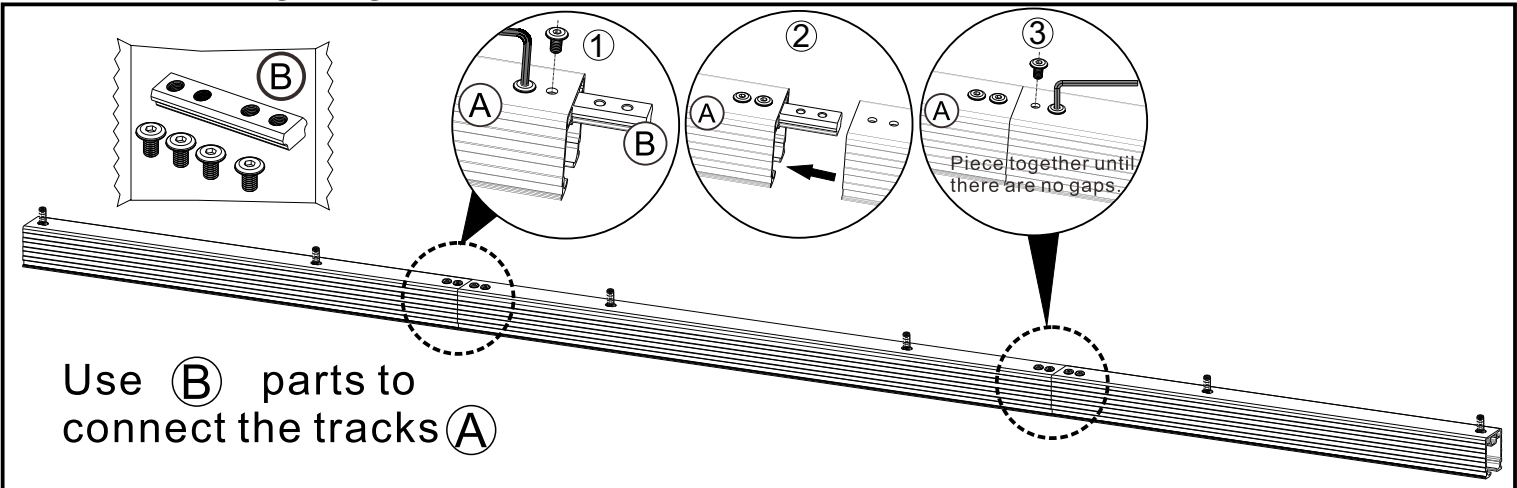

③ Put the pulley into the track

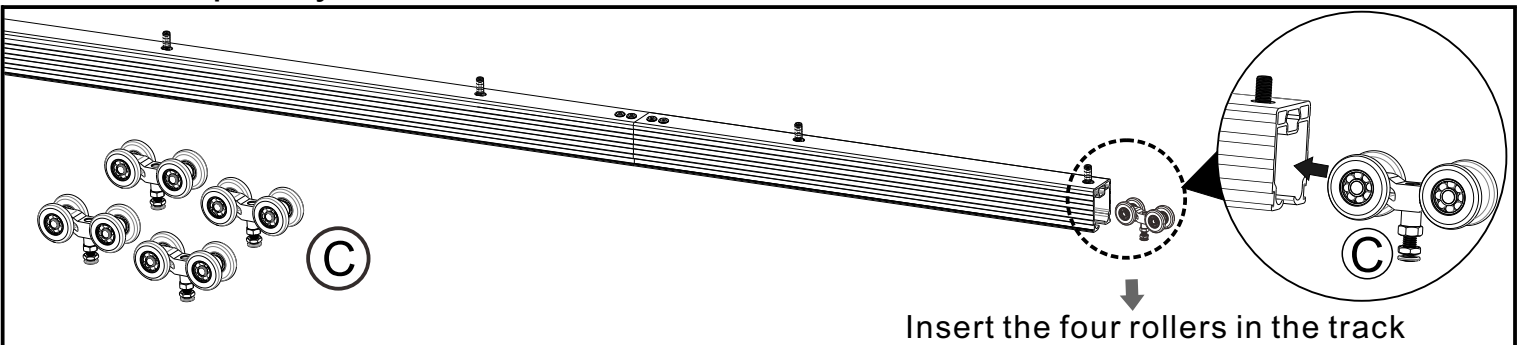

④ Install (D) (pulley stoppers) in the track

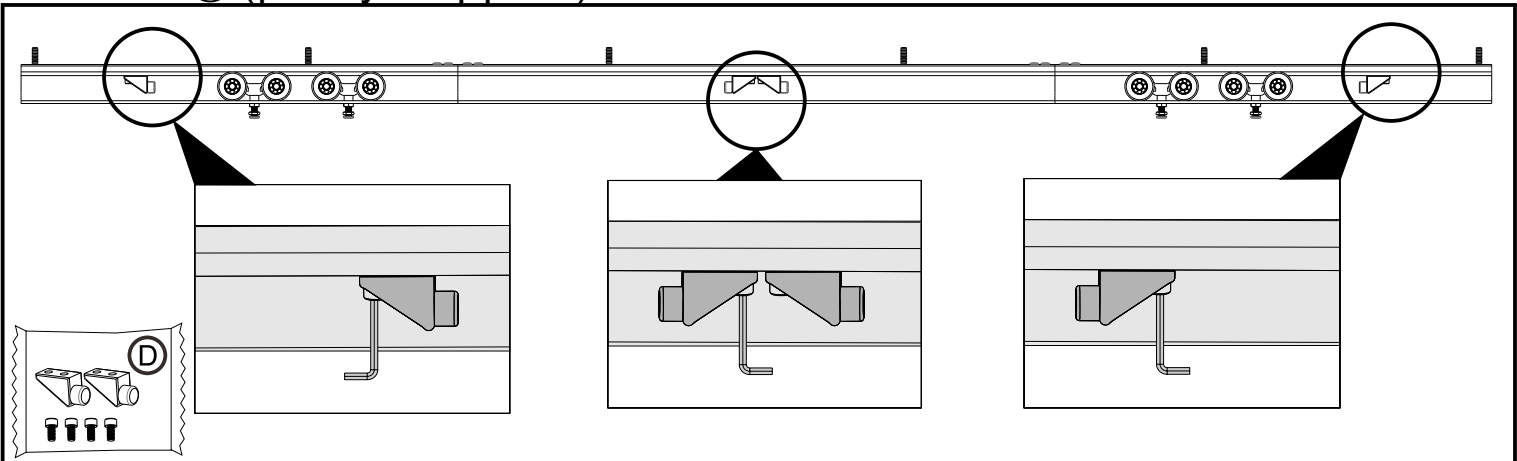


Step 2: Install the track ("Plasterboard Wall" and "Wood Frame Wall" installation process in P7-P9; "Concrete Wall" please check P10~P11)


The track installation process for gypsum board wall and wood framed walls is as follows.

(The header board needs to be prepared by yourself.)


- ① Before installation, please "Prepare a Backboard" (please refer to the following suggested backboard size) and some nails needed to fix the backboard.

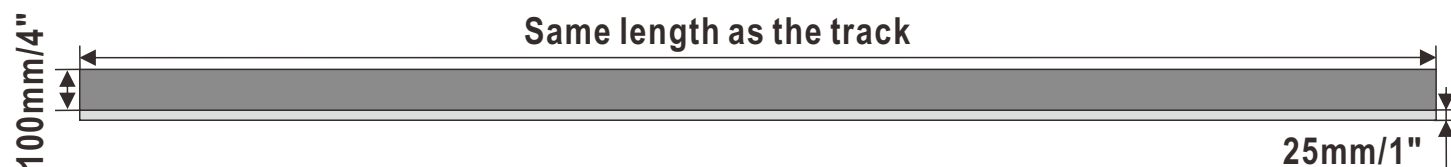

- ② After the backboard is ready, please determine the installation position.

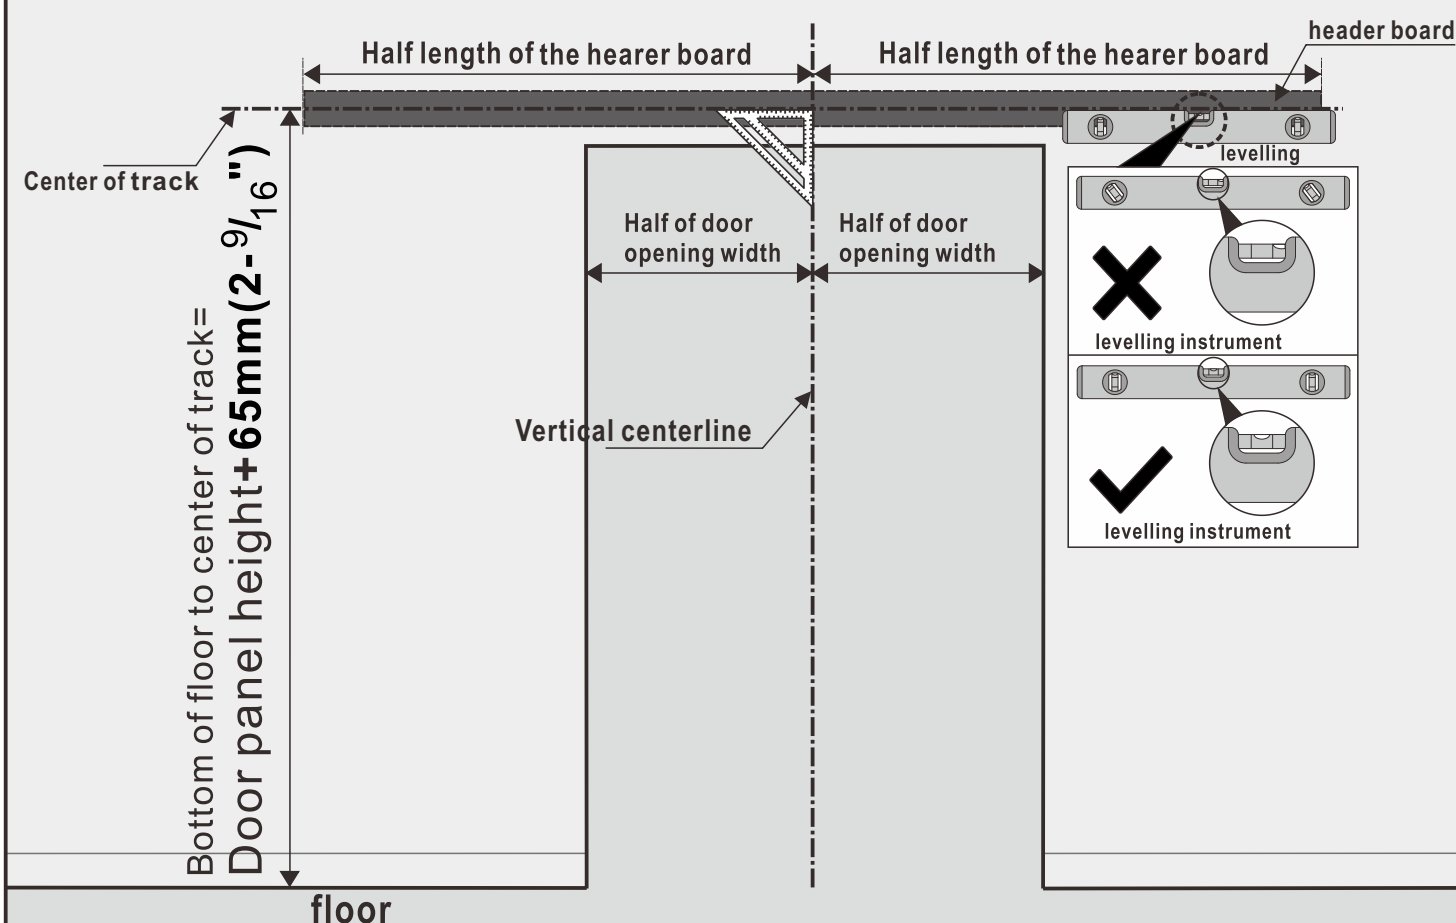


- ③ Use the Stud Finder to determine the load bearing position and install the backboard.

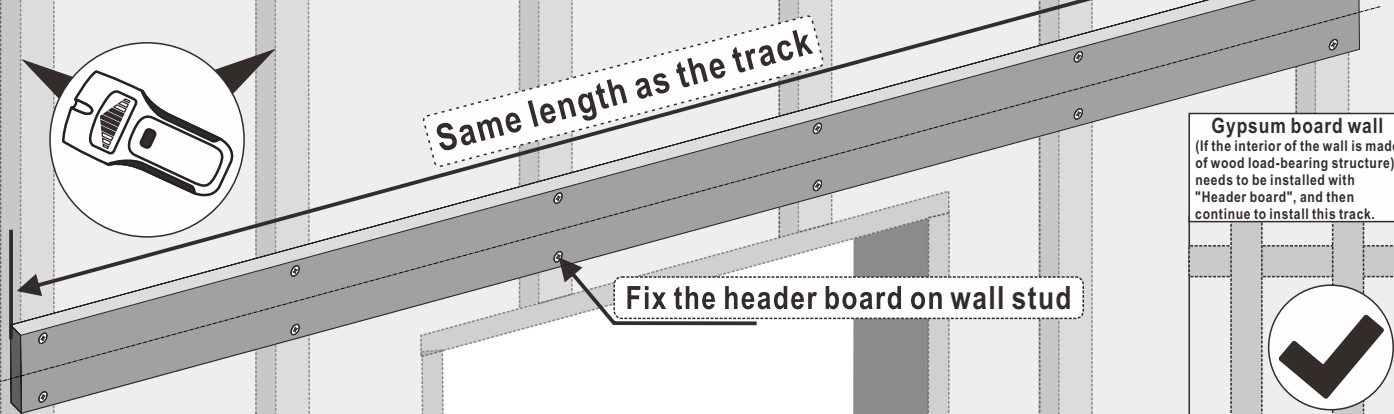


The track installation process for gypsum board wall and wood framed walls is as follows.

- ④ As shown in the figure, find the drilling position on the wooden board and mark it

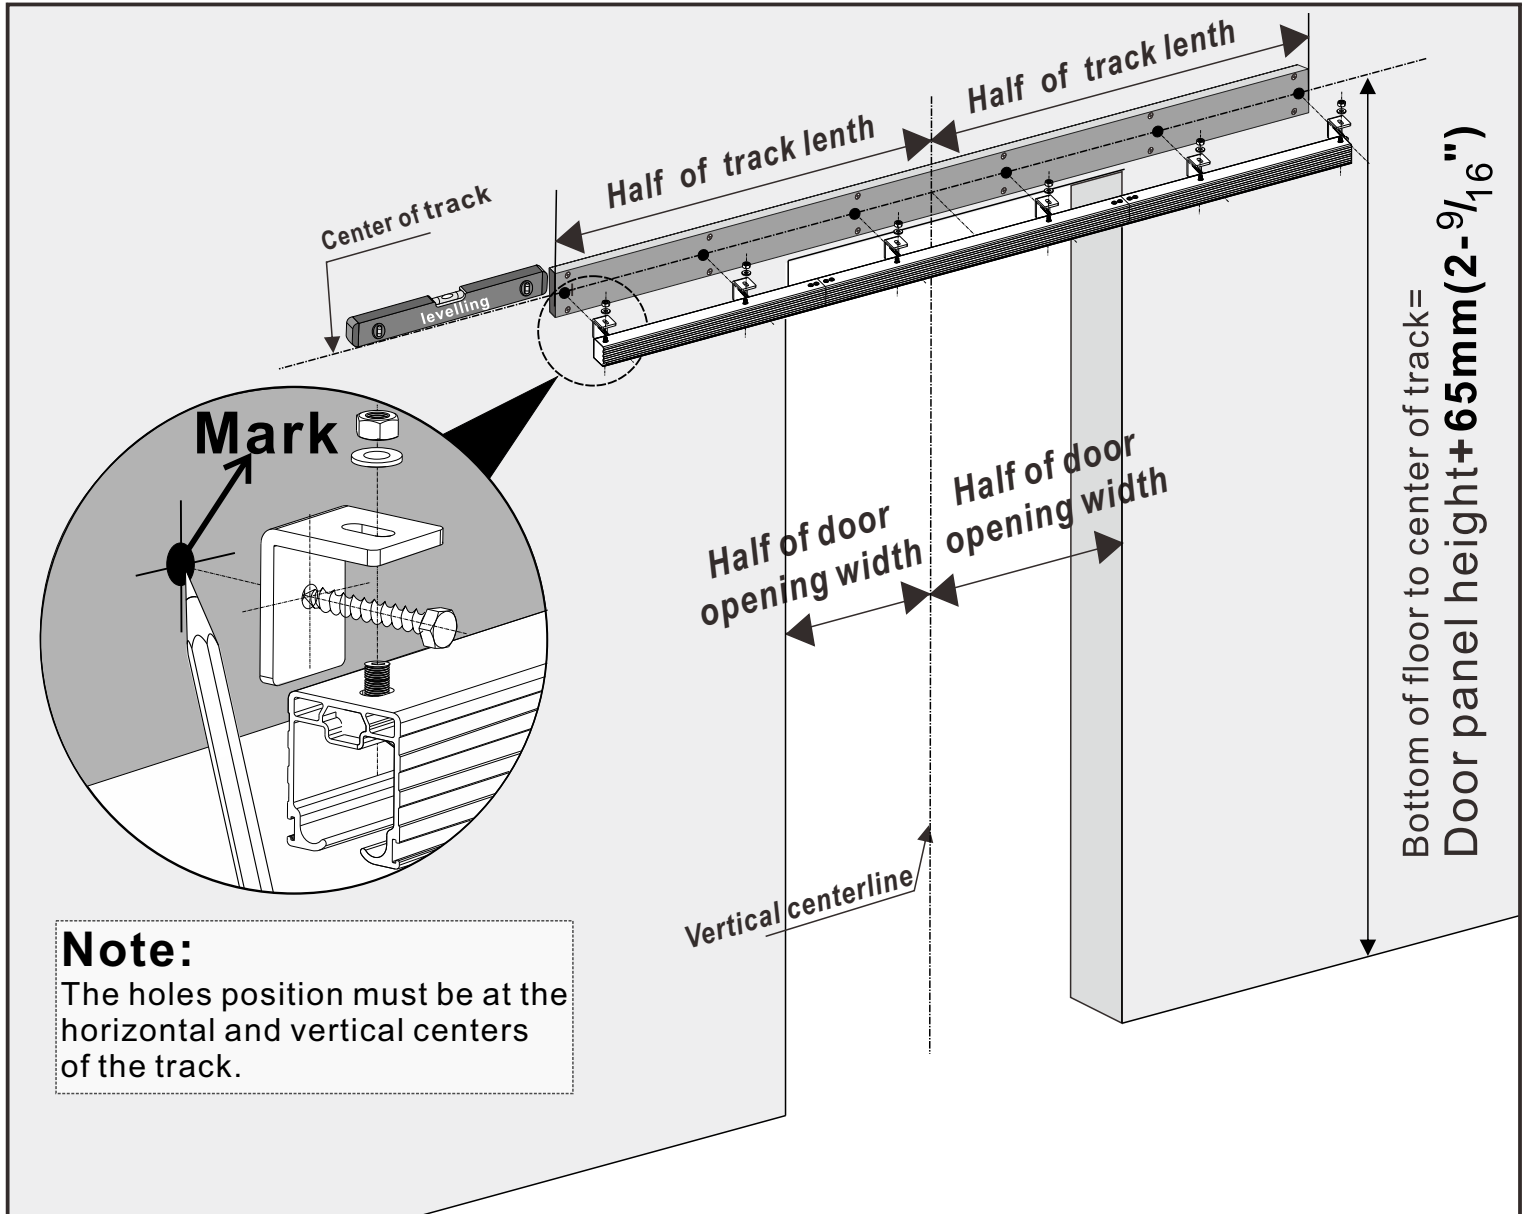


- ⑤ Refer to the dimensions in the attached table and proofread the dimensions again with a tape measure

⚠ The attached table is on the third page

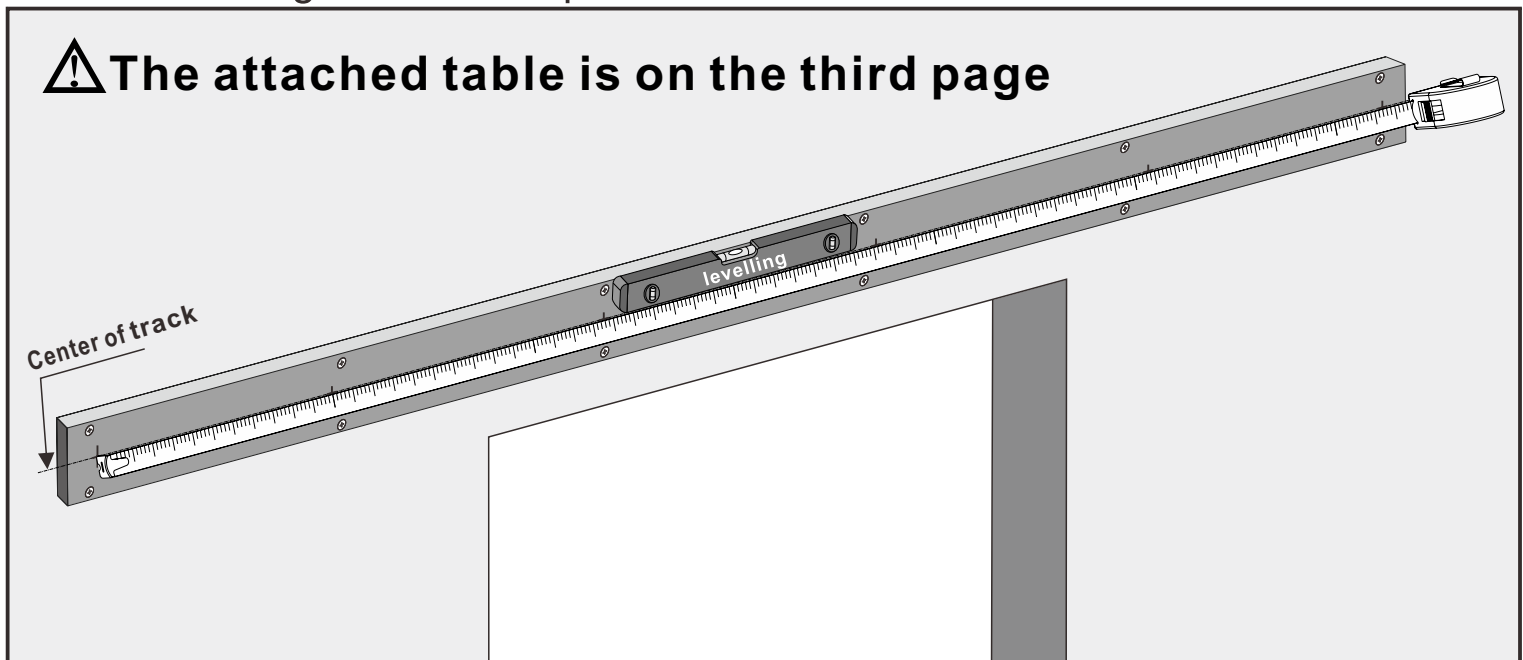


The track installation process for gypsum board wall and wood framed walls is as follows.

⑥ Drill deep 50mm(2") holes with 3mm(1/8") power drill

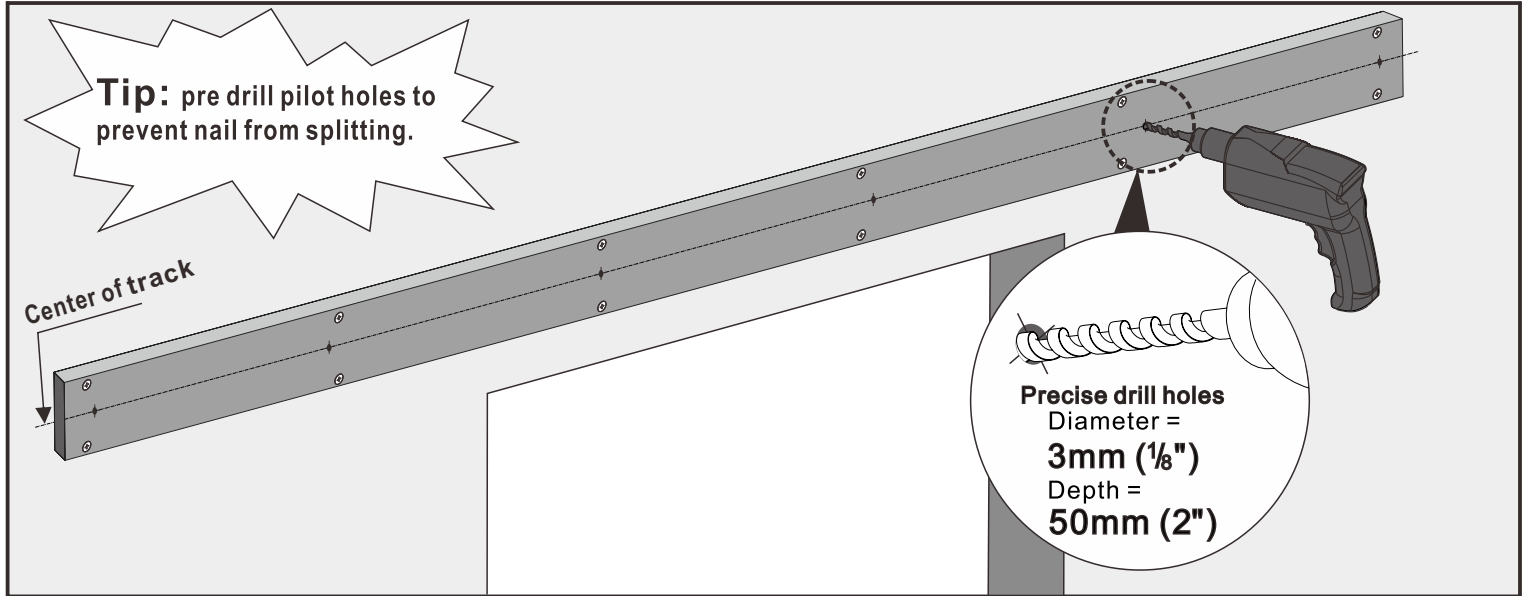


⑦ Install Track

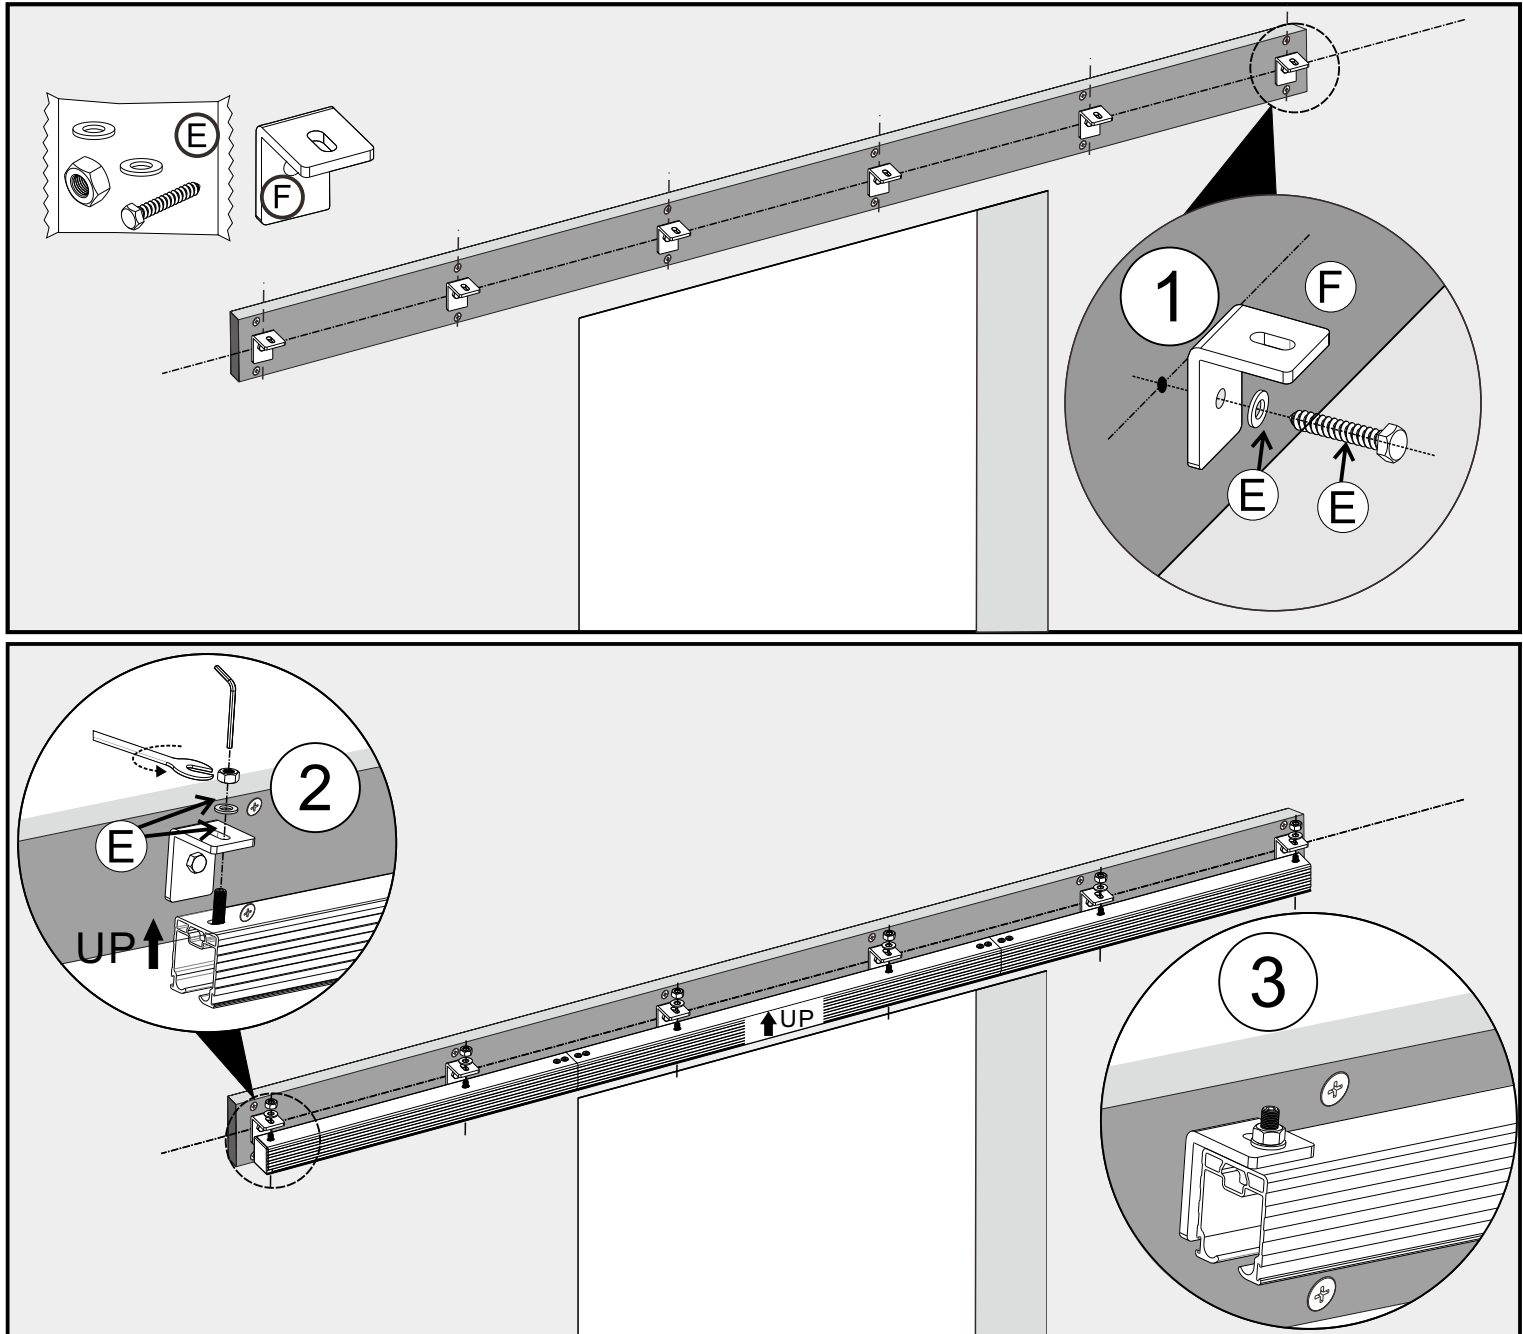


The track installation process for Solid Brick Wall\Hollow Brick Wall\Concrete wall and cement wall is as follows.

- ① Refer to the picture instructions to locate the track mounting position and mark the location of the punched holes.

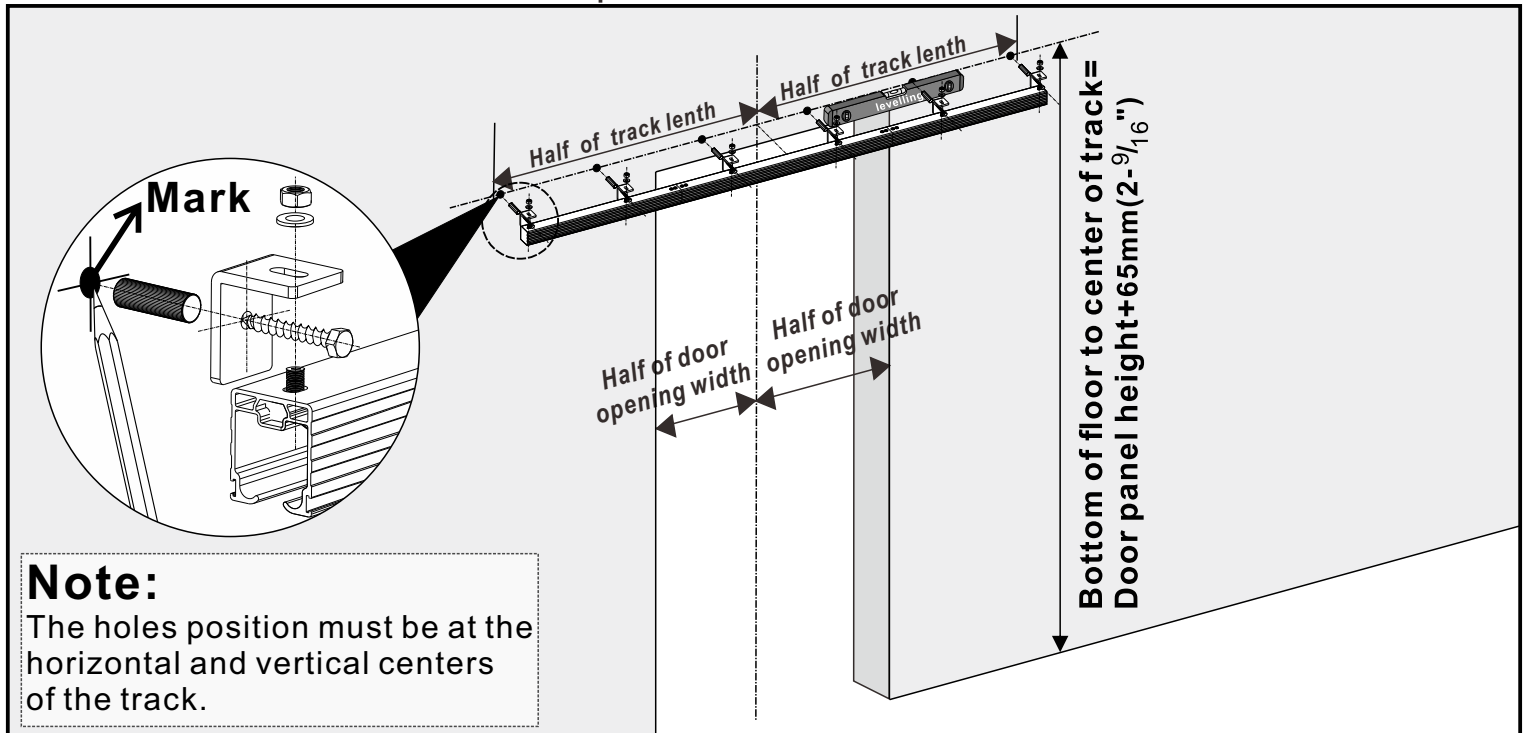


- ② Drill deep 50mm (2") holes with 15mm (19/32") power drill and put in the wood.

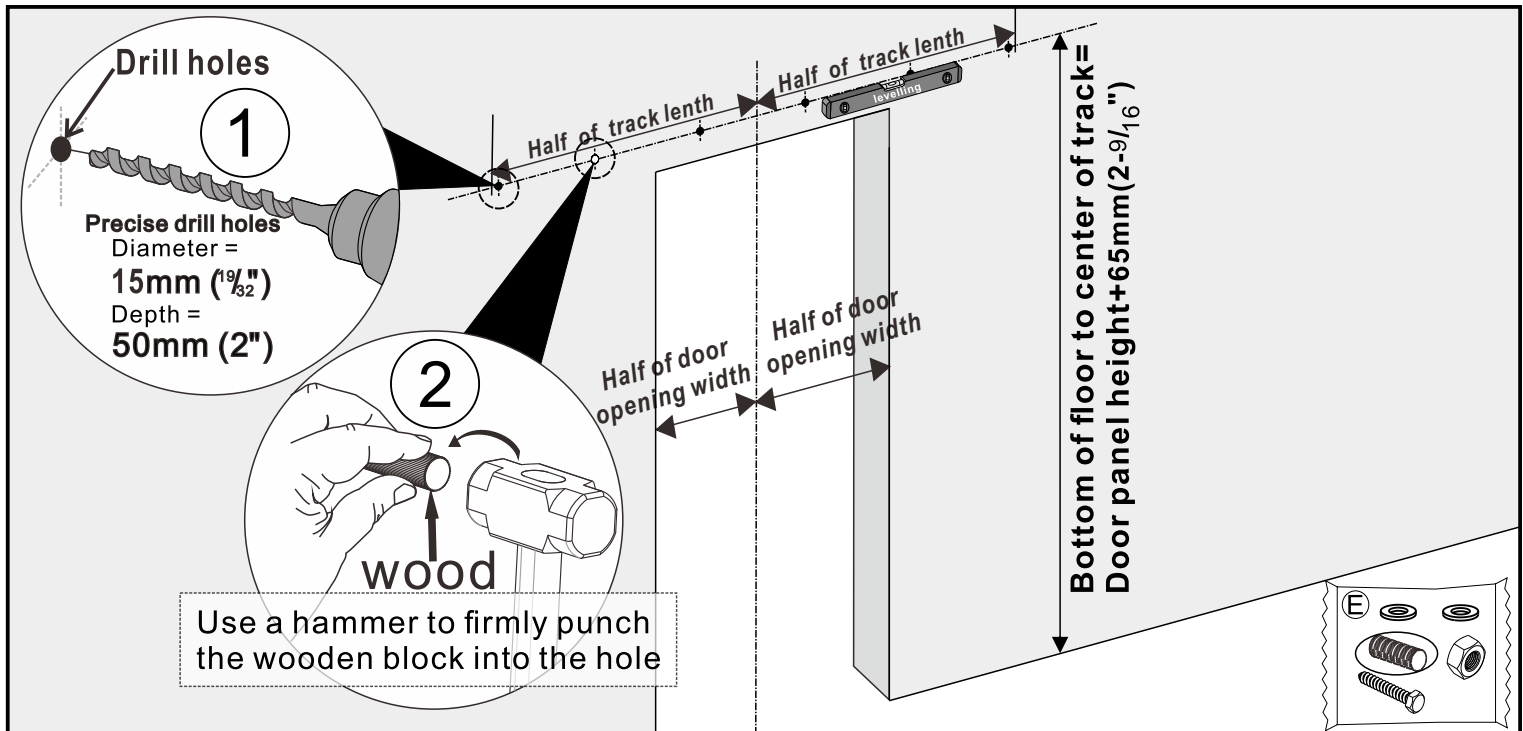

- ③ Refer to the dimensions in the attached table and proofread the dimensions again with a tape measure (mark the location of the punch on the wood nails.)




The attached table is on the third page


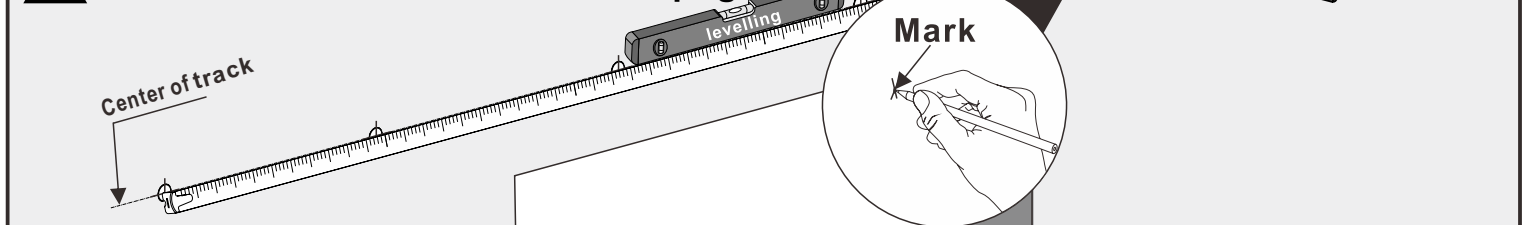


The track installation process for Solid Brick Wall\Hollow Brick Wall\Concrete wall and cement wall is as follows.

④ Drill deep 50mm(2") holes with 3mm(1/8 ") power drill

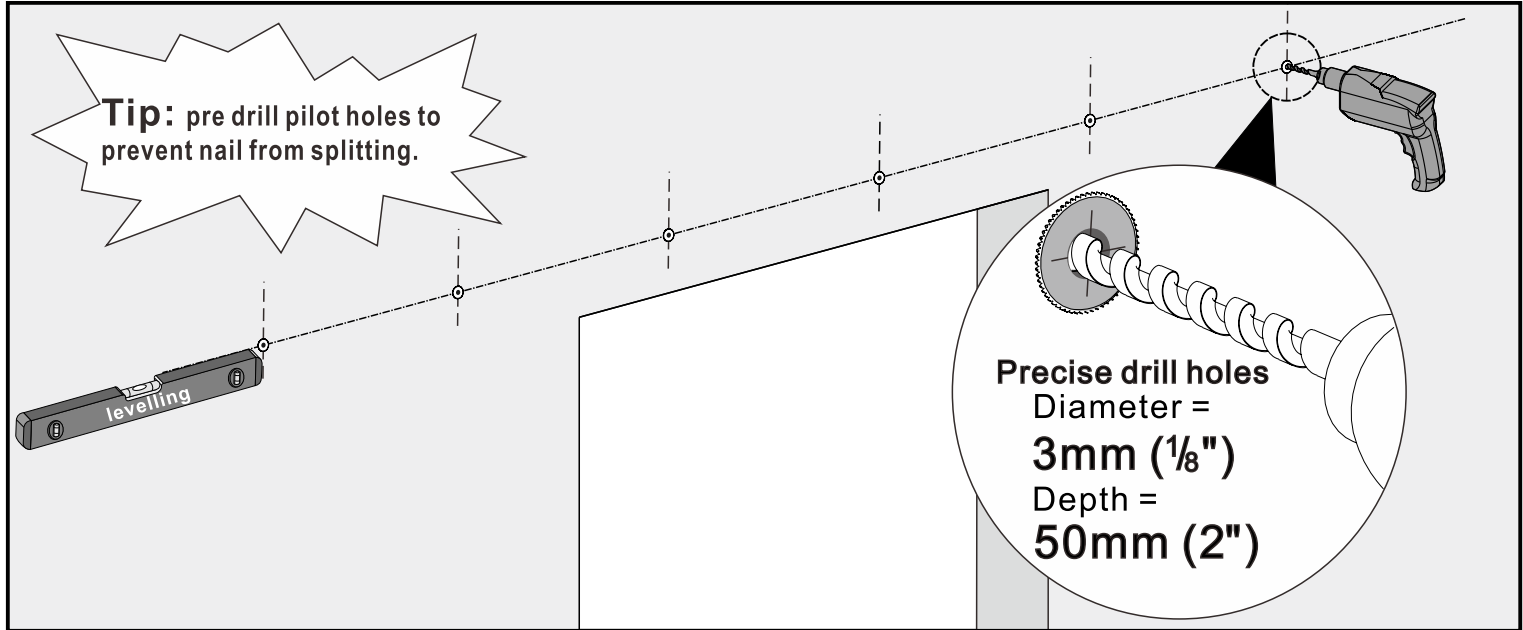


⑤ Install Track

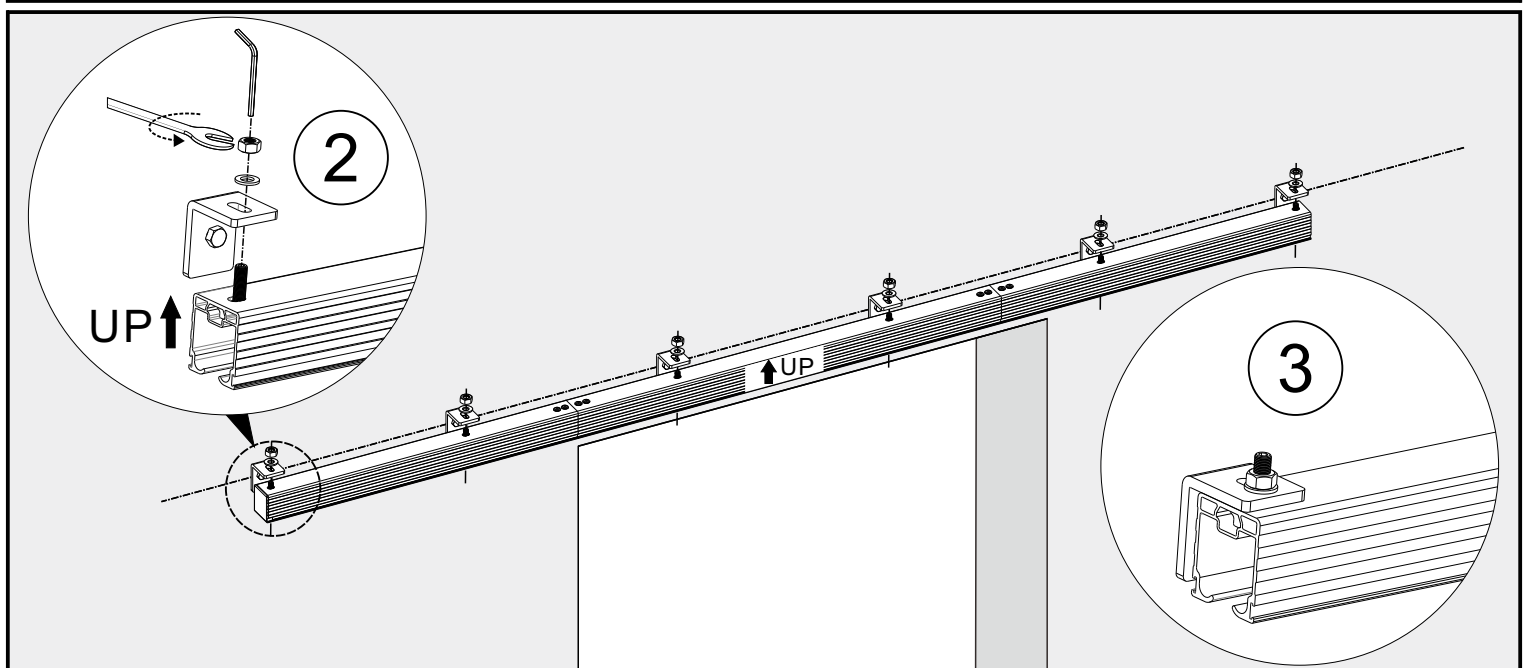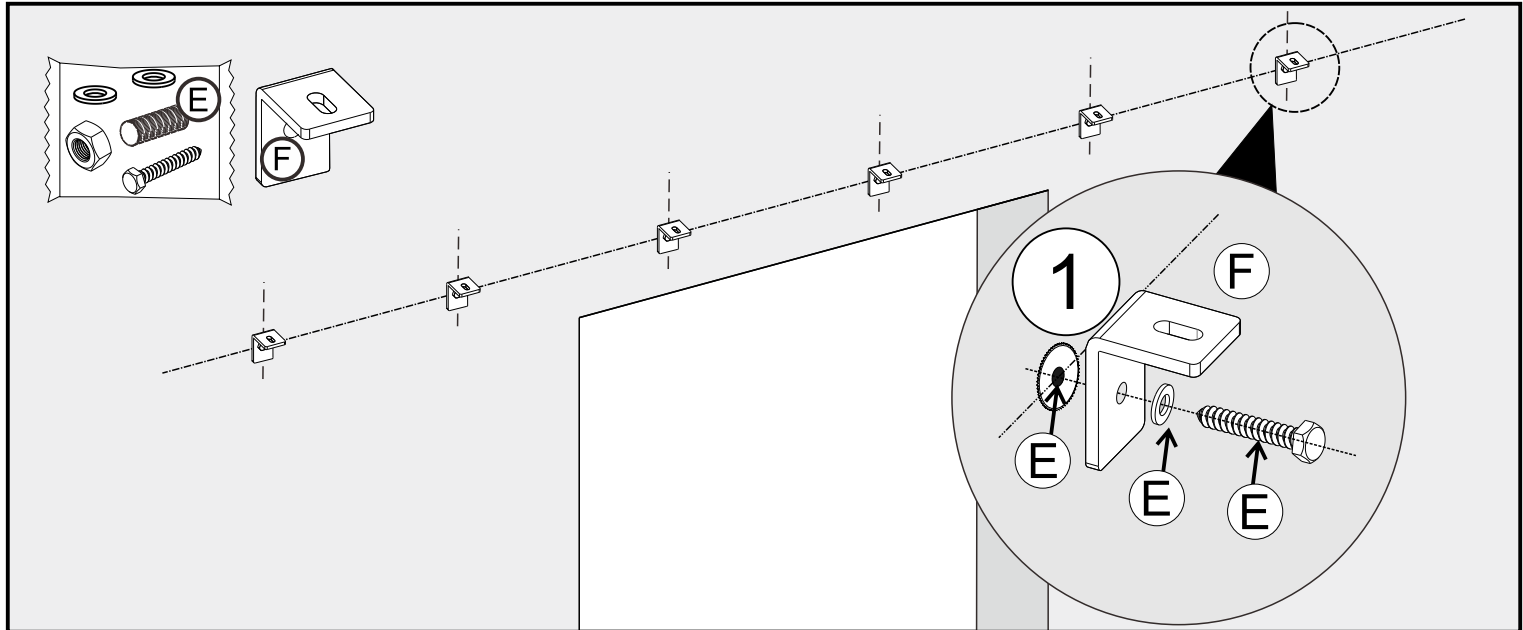


Step3 Bottom Slotting of Door Panel and Hangers Installation

① Slot according to size at the bottom of the door.



If you have a floor guide that doesn't require slotting, you can ignore this step.

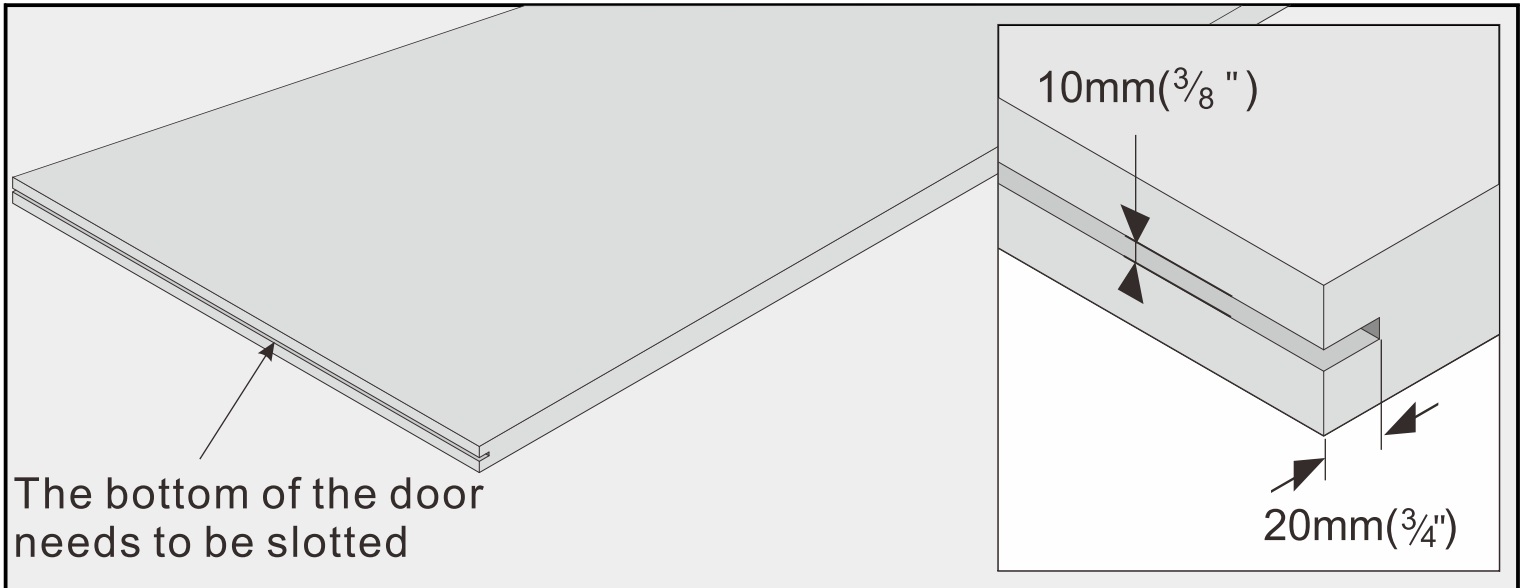

② Use a drill bit with a diameter of 11mm ($\frac{7}{16}$ ") to drill holes on the door panel as shown.

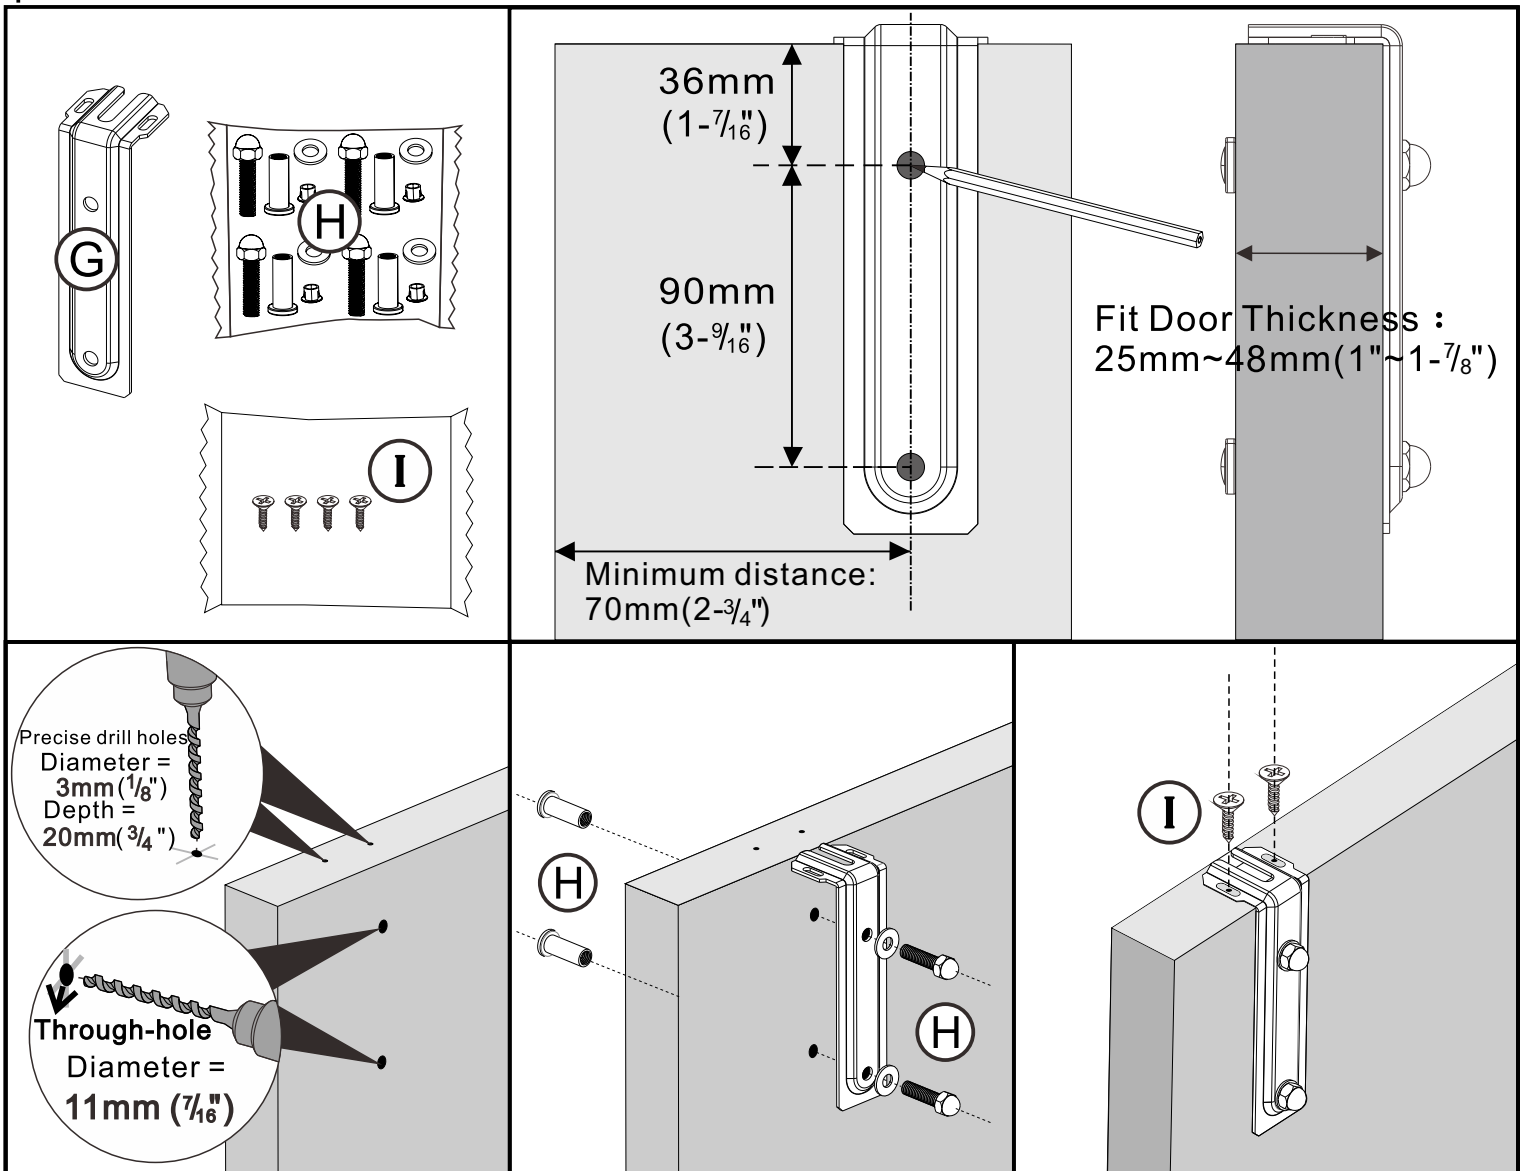


Step4 Hanging the door

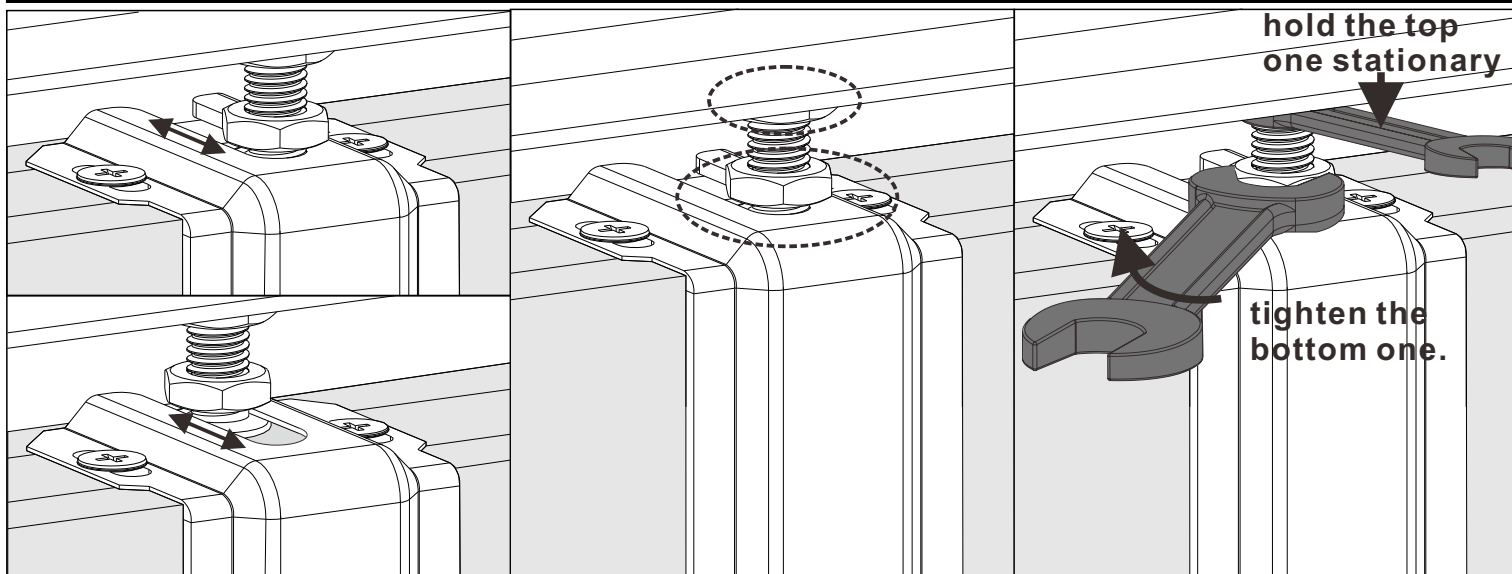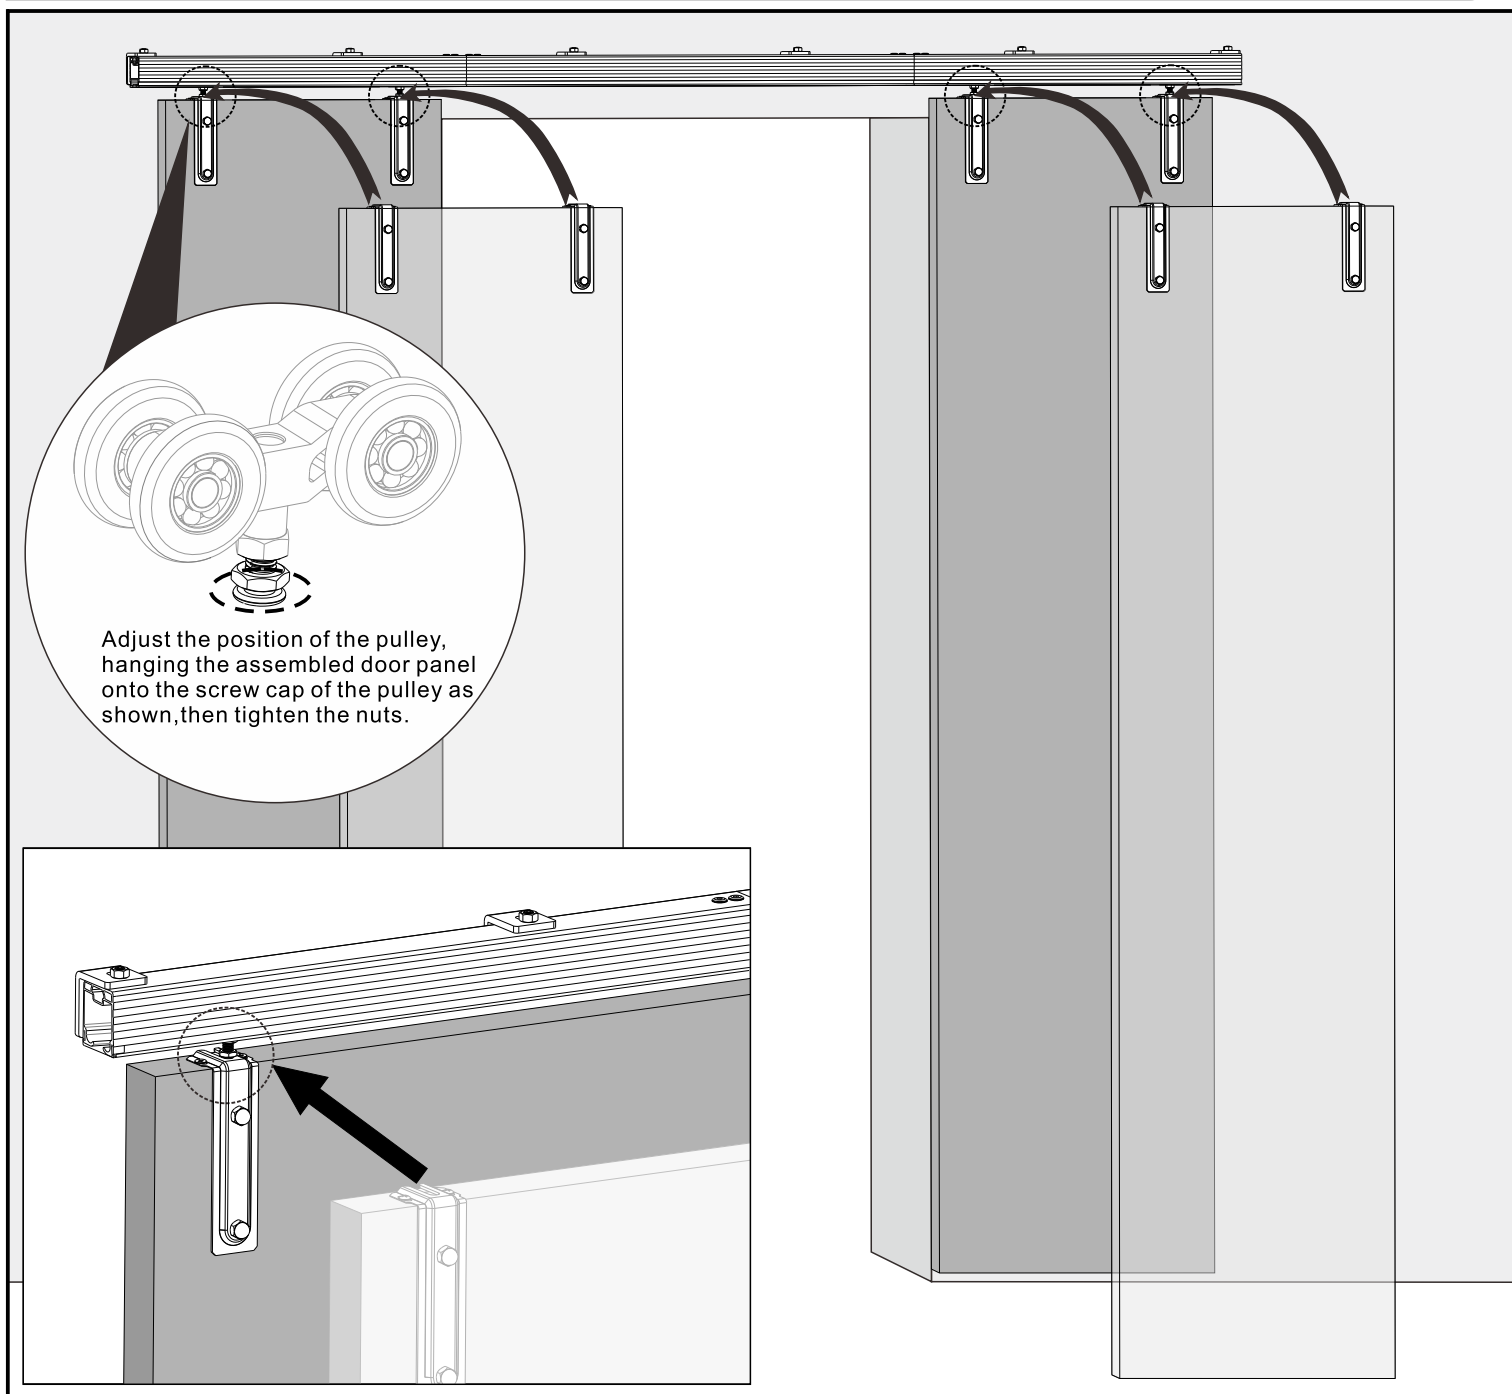


- ① Fine-tuning the front and rear positions of the door panels
- ② Tighten the screws in the picture
- ③ Use two wrenches, hold the top one stationary and tighten the bottom one.

Step5 Install Floor Guide

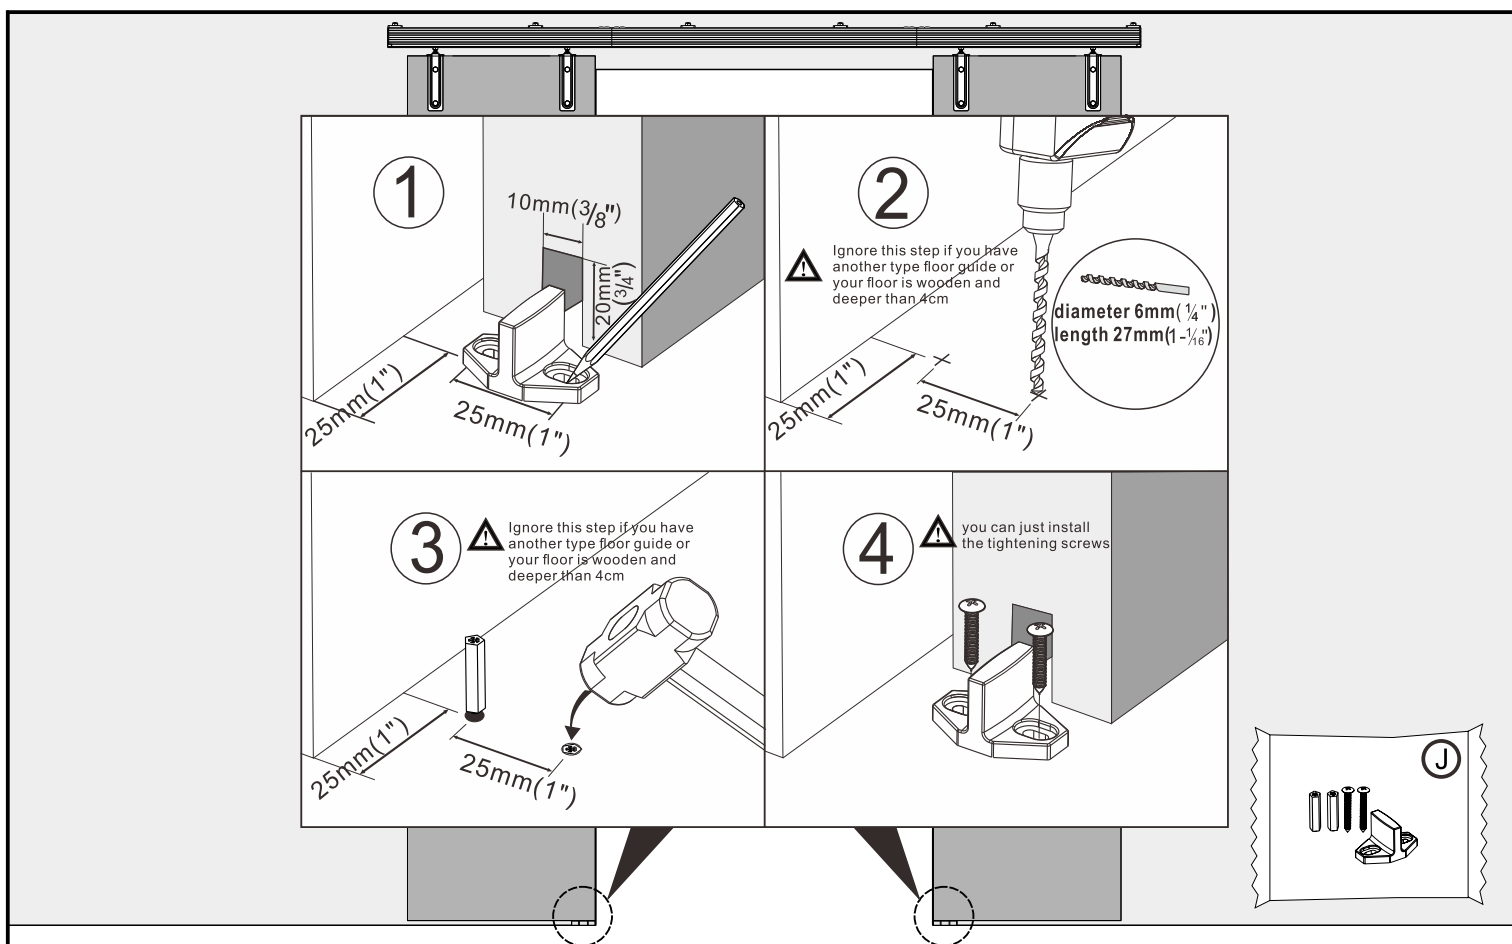


Step6 Slide the door on open status

push the pulley stopper close to the pulley in shown
use the Allen key screw up the pulley stopper

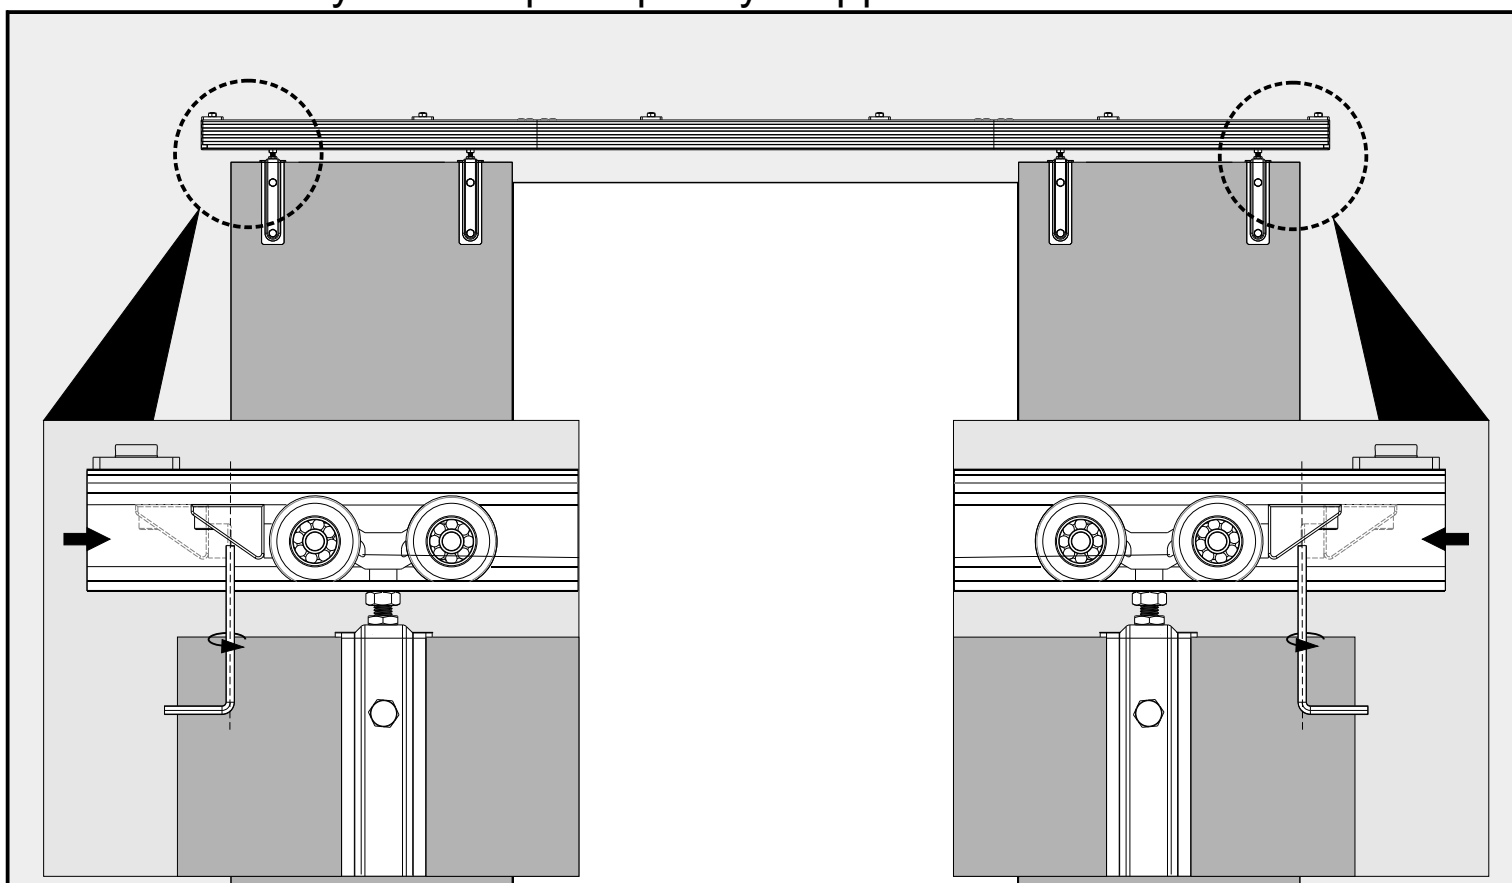

Step7 Slide the door on close status

Slide the door on colse status use the Allen key screw up the pulley stopper

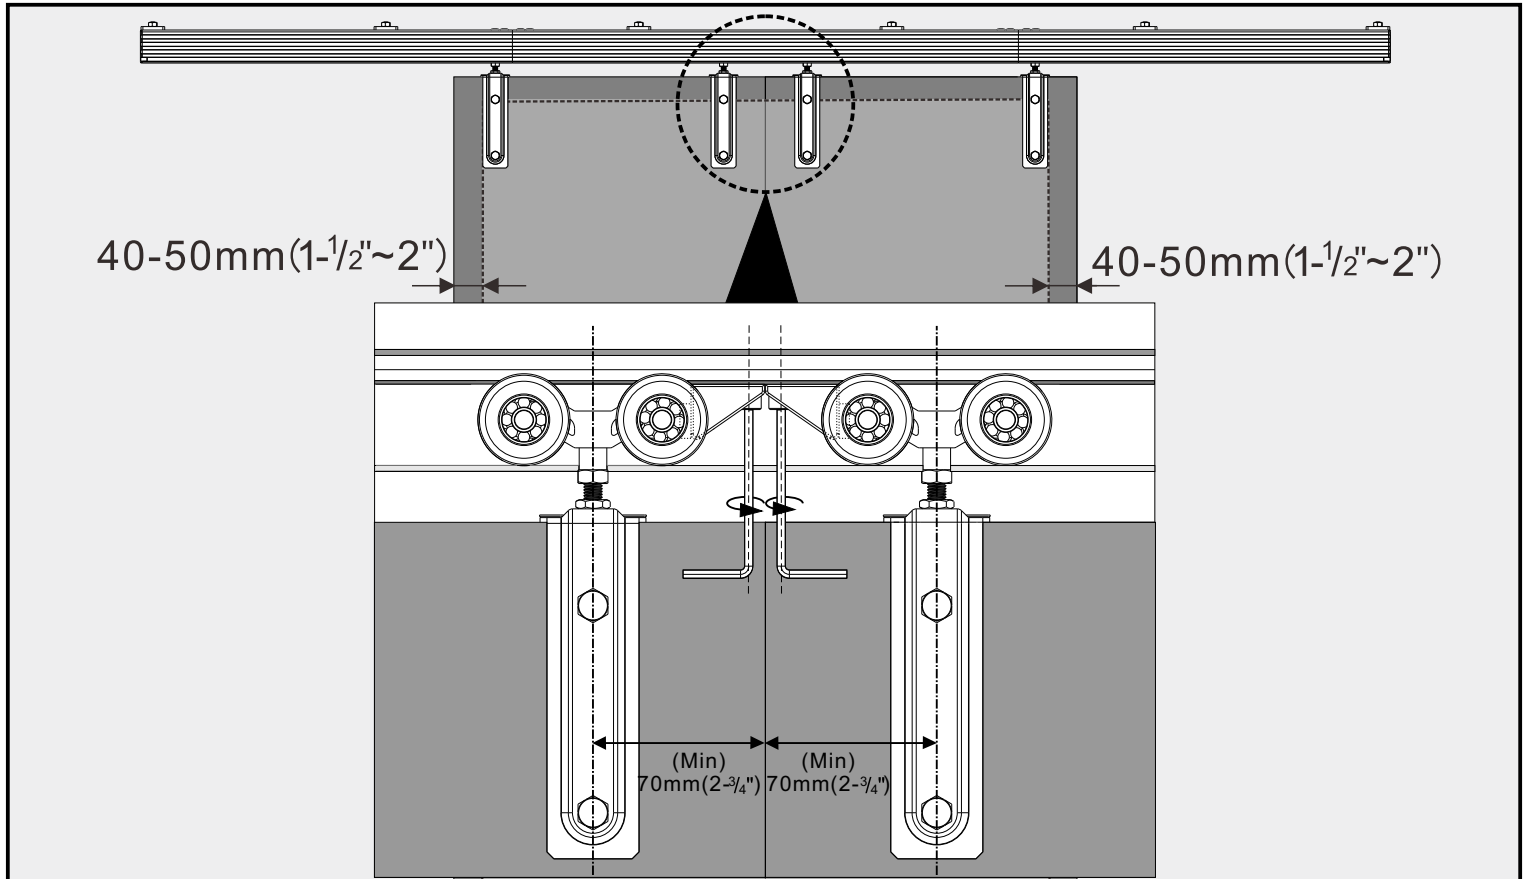

Step8 Install the Track End Plug

