

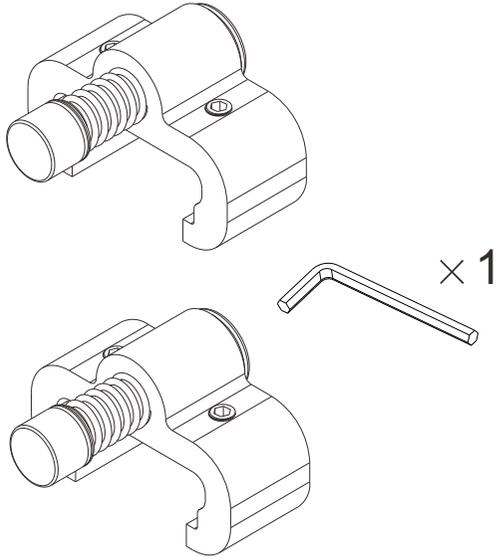
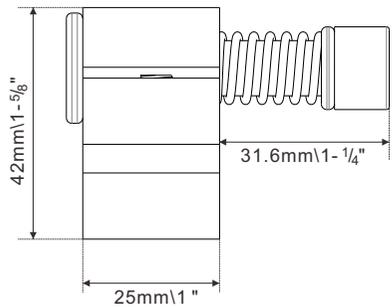


Package Include

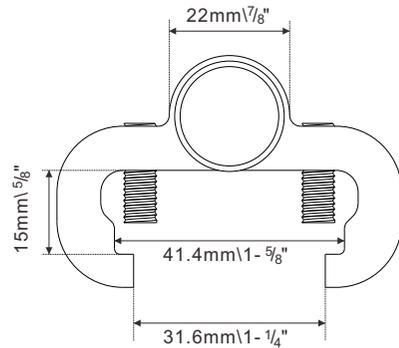

Product size

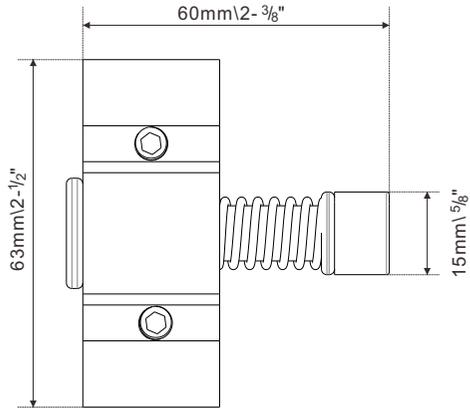


notice:

1 The item can not fit any T-shape hangers.




2. The stopper can be used when the gap between the door and the track min. 11mm (7/16"). Gap less than 11mm (7/16"), not applicable.


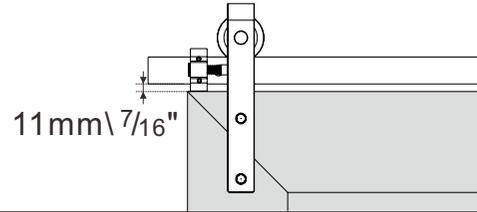


Installation Steps

① Use an allen wrench to loose the screw

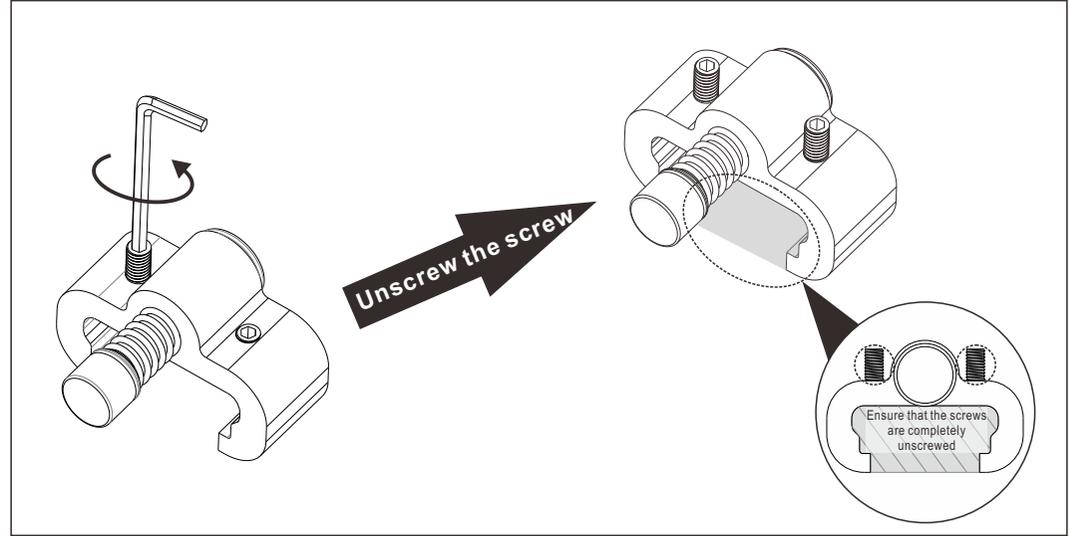

② Hang the stopper as shown

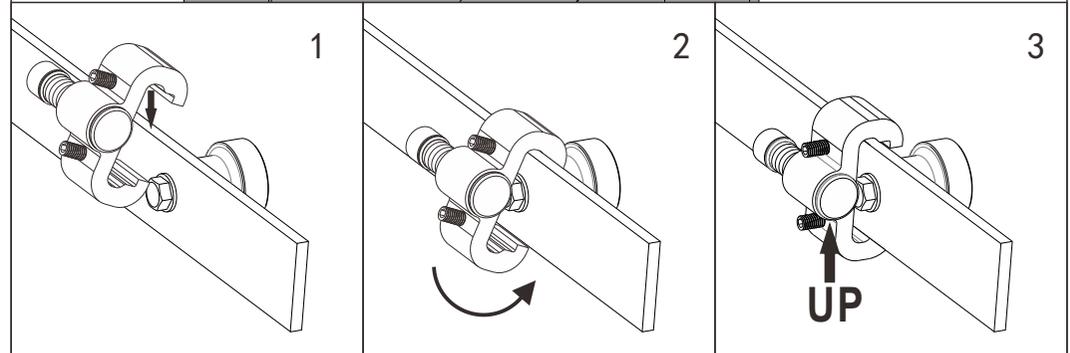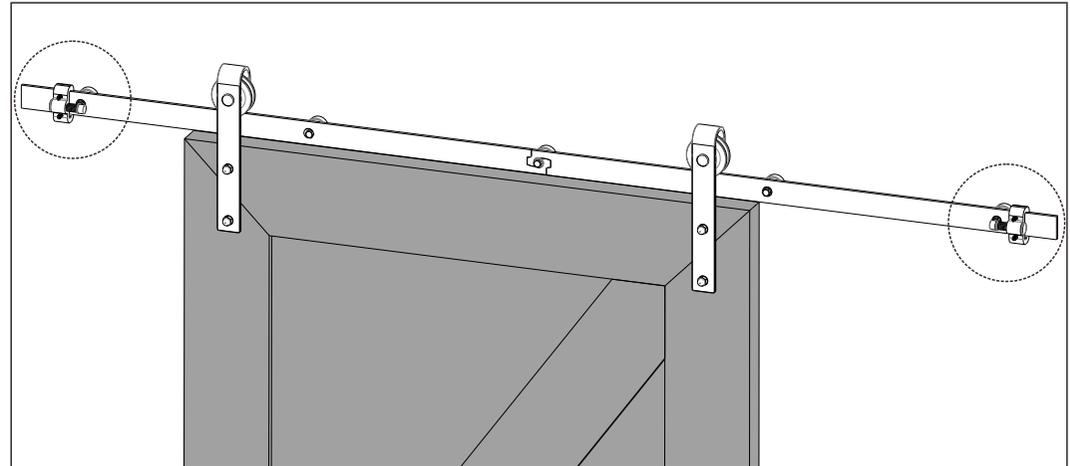


Fit track thickness under 6.5mm (1/4")

Only fit 40mm (1-9/16") width track

INSTRUCTIONS

011000161028

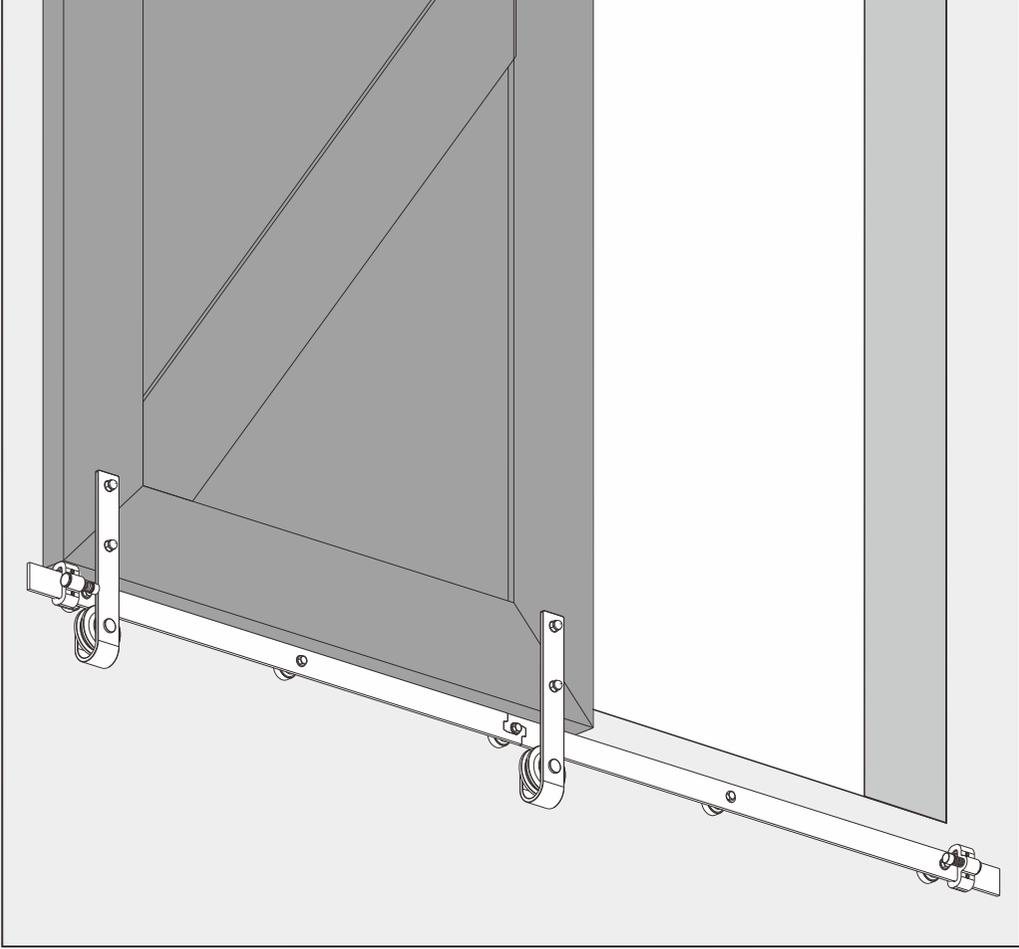

A00XWQ2


Company: YH Consulting Limited
 Address: C/O YH Consulting Limited Office
 147, Centurion House, London Road,
 Staines-upon-Thames, Surrey, TW18 4AX
 Mail: H2YHUK@gmail.com

Company: E-CrossStu GmbH
 Address: Mainzer Landstr.69, 60329
 Frankfurt am Main
 Mail: E-CrossStu@web.de


UK	REP
----	-----

EC	REP
----	-----

③ Open the door, adjust the door stopper position, and fix it.

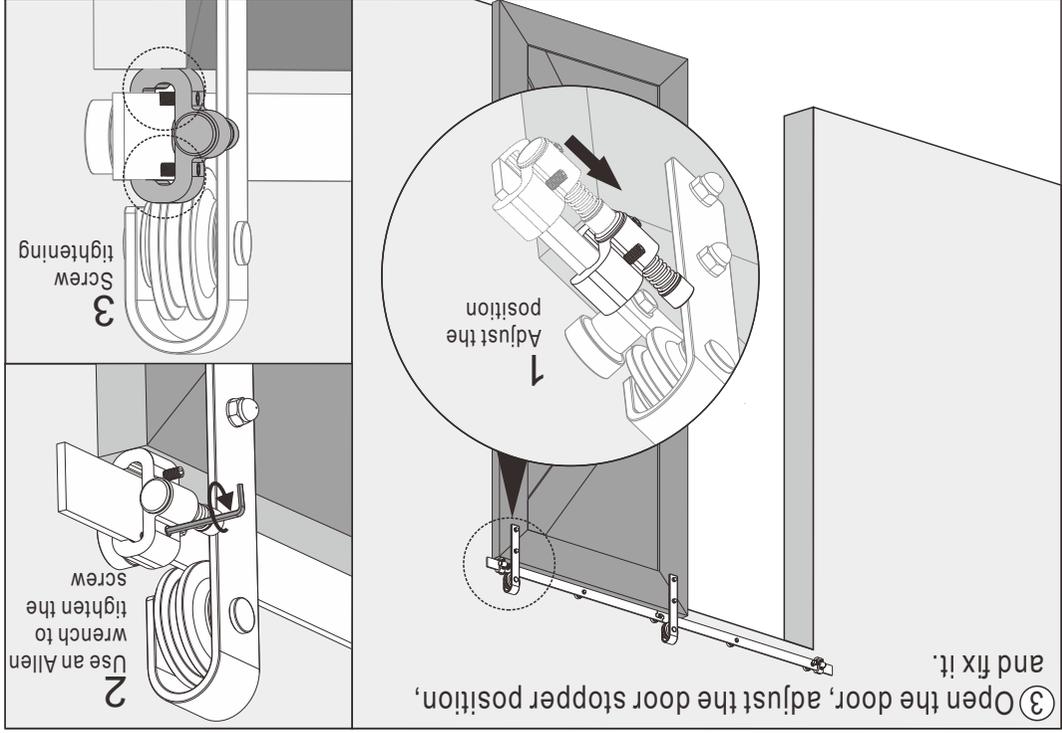

④ Close the door, adjust the door stopper position, and fix it.

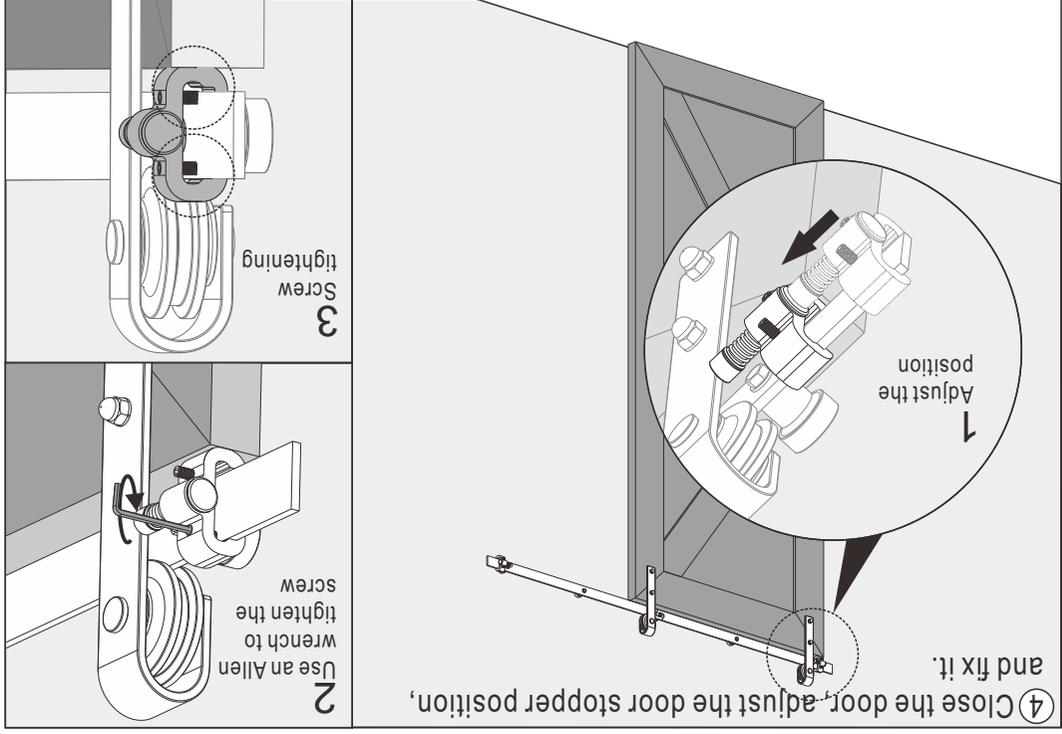

2 Use an Allen wrench to tighten the screw

3 Screw tightening

2 Use an Allen wrench to tighten the screw

3 Screw tightening